

Transmitter TRANSMAG 2 with sensor 911/E

Overview



SITRANS F M 911/TRANSMAG 2

SITRANS F M TRANSMAG 2 is a pulsed alternating field magnetic flowmeter where the magnetic field strength is much higher than conventional DC pulsed magnetic flowmeters.

This makes it ideal for difficult applications like:

- High concentrated paper stock > 3%
- Heavy mining slurries
- Mining slurries with magnetic particles.

TRANSMAG 2 is used with the SITRANS F M 911/E sensor, available with diameters of DN 15 to DN 1000.

Benefits

- Fast signal processing with 16-bit technology
- Automatic recognition of sensor type and calibration data as result of SmartPLUG
- PROFIBUS PA (profile 2.0) / HART communication
- Simple menu operation with two-line display
- Self-monitoring functions
- Internal simulator (for all input and output functions)
- Monitoring of sensor using magnetizing current and reference voltage as well as wet electrode function
- Analog output and digital outputs for pulses, device status, limits, flow direction, frequency output
- Optional passive switch input for resetting the counter values or for switching off the measuring equipment (PZR)
- With pulsed alternating field for minimum conductivity of $\geq 1 \mu\text{S}/\text{cm}$, on request $0.1 \mu\text{S}/\text{cm}$ depending on medium
- Fully-welded steel enclosure
- Liners available in hard rubber, PTFE, Linatec, Soft rubber or Novolak

Application

The main applications of the SITRANS F M transmitter TRANSMAG 2 can be found in the following sectors:

- Pulp and Paper industry
- Mining industry

The measuring procedure with pulsed alternating field patented by Siemens AG is particularly suitable for media with a high solids content, or magnetically conducting media.

Design

The complete flowmeter consists of a flow sensor and an associated transmitter from the SITRANS F M TRANSMAG 2 for pulsed alternating field. These are available as remote version. They operate according to Faraday's law of induction where an electric voltage is induced in a conductor moving through a magnetic field.

Function

The TRANSMAG 2 is a microprocessor-based transmitter with a build-in alphanumeric display in several languages. The transmitters evaluate the signals from the associated electromagnetic sensors and also fulfil the task of a power supply unit which provides the magnet coils with a constant current.


The magnetic flux density in the sensor is additionally monitored by reference coils.

Further information on connection, mode of operation and installation can be found in the data sheets for the sensors.


Displays and keypad

Operation of the TRANSMAG 2 transmitter can be carried out using:

- Keypad and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS PA communication

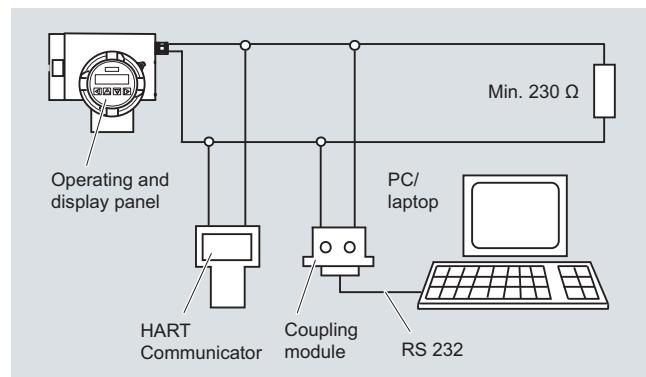

HART communication

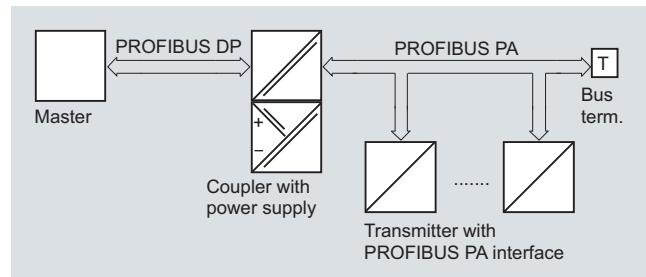

PROFIBUS PA communication

Flow Measurement

SITRANS F M

Transmitter TRANSMAG 2 with sensor 911/E

Technical specifications

Mode of operation and design

Measuring principle	Electromagnetic with pulsed alternating field (PAC)
Magnetic field excitation	Automatic power supply synchronization
- 50 Hz AC power supply	Bipolar (16.7 Hz) Bipolar with prepulse (10 Hz) Unipolar (8.33 Hz)
- 60 Hz AC power supply	Bipolar (20 Hz) Bipolar with prepulse (12 Hz) Unipolar (10 Hz)

Accuracy under reference conditions

Measuring tolerance of pulse output	$\leq \pm 0.5\%$ of measured value $\pm 1.2 \text{ m/s}$ (3.9 ft/s)
• With $v > 0.25 \text{ m/s}$ (0.82 ft/s)	$\pm 2.5 \text{ m/s}$ (8.2 ft/s)
• With $v < 0.25 \text{ m/s}$ (0.82 ft/s)	As pulse output plus $\pm 0.1\%$ conversion error $\pm 20 \mu\text{A}$
Measuring tolerance of analog output	0.2% of measured value
Repeatability	
Reference conditions	
• Process temperature	25 °C ± 5 °C (77 °F ± 9 °F)
• Ambient temperature	25 °C ± 5 °C (77 °F ± 9 °F)
• Warm-up time	Min. 30 min
• Installation conditions	Inlet pipe section $\geq 10 \times DN$ Outlet pipe section $\geq 5 \times DN$ Installed centered in pipe
• Medium	Water without gaseous or solid components

Outputs

Electrical isolation	Outputs electrically isolated from one another and from the power supply, max. 60 V permissible against PE/equipotential bonding
<u>Current output</u>	0/4 ... 20 mA Only for 20 mA / HART devices (7ME5034-0.... or 7ME5034-2....)
• Signal	0/4 ... 20 mA, selectable 20 ... 22.5 mA, optional 3.6; 20 or 24 mA
• Load	max. 600 Ω, max. load voltage 15 V DC
- Output	$\geq 250 \Omega$
- For HART communication	Via analog output with PC coupling module or HART communicator
Communication	HART, version 5.1
• Protocol	
<u>Digital output</u>	
Signal	Configurable as active or passive signals
• Output	24 V DC, $\leq 24 \text{ mA}$, $R_i = 170 \Omega$
- Active signal	Open collector, max. 30 V DC, 200 mA
- Passive signal	

Output configuration

• Pulse	≤ 5000 pulses/s
- Pulse significance	$\geq 0.1 \text{ ms}$
- Pulse width	$\leq 10000 \text{ Hz}$
• Limit frequency	Limits for flow and quantity, flow direction, alarm
• Limits	

Digital output 2 (relay)

(only 7ME5034-0....)

Relay

• Rating	Max. 5 W, max. 50 V AC/DC, max. 200 mA
• Output configuration	Limits for flow and quantity, flow direction, alarm

Digital input (optional to digital output 2)

(only 7ME5034-2....)

• Input function configurable as high-active or low-active	Set measured value or counter to zero
• Signal voltage	Max. 30 V DC, $R_i = 3 \text{ k}\Omega$: High level: +11 ... +30 V DC Low level: -30 ... +5 V DC

For PROFIBUS devices

PROFIBUS PA (for PROFIBUS-devices 7ME5034-1....)

• Communication	Layer 1 and 2 according to PROFIBUS PA Transmission according to IEC 1158-2 Layer 7 (protocol layer) according to PROFIBUS PA and DP V1 (EN 50170) Device class B, device profile 2.0 Max. 4 simultaneous C2 connections
• Bus voltage	9 ... 32 V DC permissible
• Current consumption from bus	10 mA; limited to $\leq 15 \text{ mA}$ in event of fault by electrical current limitation

Rated operating conditions

Installation conditions	See also sensor
Ambient temperature	-20 ... +60 °C (-4 ... +140 °F) 0 ... 50 °C (32 ... 122 °F)
• Operation	-25 ... +80 °C (-13 ... +176 °F)
• Display module	IP67/NEMA 4X
Storage	To IEC/EN 61326 for use in industrial areas
Degree of protection	To IEC/EN 61326 for use in industrial areas
Electromagnetic compatibility (EMC)	NAMUR NE21 for use in residential areas
• Emitted interference	
• Noise immunity	

Transmitter TRANSMAG 2 with sensor 911/E

Medium conditions	
• Process temperature	-20 ... +150 °C (-4 ... 302 °F) depending on her liner
Minimum conductivity of medium	$\geq 1 \mu\text{S}/\text{cm}$, on request $0.1 \mu\text{S}/\text{cm}$ depending on medium
• With SITRANS FM 911/E sensors	
Design	
Weight of transmitter	4.4 kg (9.7 lb)
Remote version	Transmitter must be connected to sensor using shielded cable
Maximum cable length	100 m (328 ft)
Housing	Die-cast aluminium, painted
Displays and keypad	
General display	LCD, backlid, two lines with 16 characters each
Multi-display for	Flow, totalizer, flow velocity
Keypad	4 keys for entering parameters
Power supply	
corresponding to rating plate	
• AC supply	100 ... 250 V AC $\pm 15\%$, 47 ... 63 Hz
• Power consumption	Approx. 120 ... 630 VA, depending on sensor
Power failure	Bridging of min. 1 power supply cycle (> 20 ms)
Line fuse	100 ... 230 V AC: T1.6A
Magnet current fuse	F5A / 250 V

Sensor cables between sensor and transmitter

The signal voltage proportional to the flow and present at the electrodes of the EMF is only a few μV to mV . Superimposed on this are electrochemical interferences resulting from the contact between the electrodes and liquid, and which can be up to several Volt. Also frequently superimposed are line frequency interferences, interferences resulting from vibrations on the pipelines or signal cables, as well as strong magnetic fields in the vicinity. Sufficient shielding must therefore be provided, as well as fixed routing of the signal cables (electrode and magnet current cable) in the case of remote versions. This also applies to devices with integral preamplifier (smartPLUG). The cable length between the sensor and transmitter must not exceed 100 m (328 ft).

Attention must also be paid to the cable routing. Signal cables must be routed free of vibration, and protected against strong magnetic and stray fields. In case of doubt, the sensor cables must be routed in earthed steel conduit.

Selection and Ordering data	Order No.
SITRANS FM electromagnetic transmitter TRANSMAG 2 for alternating field, remote version, 110 ... 230 V AC	7ME5034 - AA1 - AA0
Output/communication	
4 ... 20 mA with HART protocol	0
PROFIBUS PA connection	1
4 ... 20 mA with HART protocol, digital input	2
Operator display and keypad	
Without	0
With	1
Cable glands	
M20/M16 x 1.5	1
1/2" NPT	2

This device is shipped with a Quick Start guide and the SITRANS F manual CD containing the complete manual library. Printed Operating Instructions are available for purchase via PMD

Selection and Ordering data	Order code
Additional information	
Please add “-Z” to Order No. and specify Order code(s) and plain text.	
Strengthened mounting bracket for wall and pipeline installation	A02
Measuring range, specify in plain text: Y01: 0 to ... m^3/h	Y01
Pulse significance, specify in plain text: Y02: 0 to ... pulses/l	Y02
Setting of digital outputs, specify in plain text: Y03: Setting of digital outputs: ...	Y03
Measuring-point number (max. 8 characters), specify in plain text: Y15:	Y15
Measuring-point description (max. 16 characters), specify in plain text: Y16:	Y16
Stainless steel tag plate	Y17
Special design specify in plain text, state quotation	Y99

Operating instructions for SITRANS FM TRANSMAG 2

Description	Order No.
Operating instructions for SITRANS FM TRANSMAG 2	
• English	A5E00102775
• German	A5E00192774
• Spanish	A5E00135276
• French	A5E00135275

This device is shipped with a Quick Start guide and a CD containing further SITRANS F literature.

All literature is also available for free at:
<http://www.siemens.com/flowdocumentation>

Flow Measurement

SITRANS F M


Transmitter TRANSMAG 2 with sensor 911/E

Accessories


Description	Order No.		Description	Order No.	
Operating/Display module	7ME5933-0AC00		M20 cable gland set for power and output connection, grey PA plastic, 2 pcs. • cables Ø 6 ... 12 mm (0.24" ... 0.47") • -40 ... 100 °C (-40 ... 212 °F)	A5E02246350	
Electronics cover with glass plate (non Ex)	7ME5933-0AC01		1/2" NPT cable gland set for power and output connection, grey PA plastic, 2 pcs. • cables Ø 6 ... 12 mm (0.24" ... 0.47") • -40 ... 100 °C (-40 ... 212 °F)	A5E02246396	
Cover for sensor cable and gasket	7ME5933-0AC02		M16 x 1.5 cable gland set for sensor connection, brass chrome, 2 pcs. and 2 pcs. blind • cables Ø 5 ... 9 mm (0.20" ... 0.35") • -20 ... 105°C (-4 ... 221 °F)	A5E02246369	
Cover for mains supply/communication	7ME5933-0AC03		IP68/NEMA 6P potting kit	FDK-085U0220	
Standard wall mounting bracket	7ME5933-0AC04				
Special wall-/pipe mounting bracket kit	7ME5933-0AC05				
Safety clamp for electronic cover with glass plate (7ME5933-0AC01)	7ME5933-0AC06				

Transmitter TRANSMAG 2 with sensor 911/E

Dimensional drawings

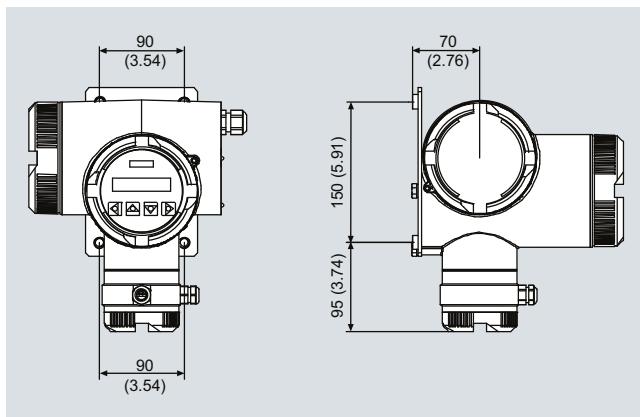


SITRANS FM transmitter TRANSMAG 2 with wall mounting bracket, dimensions in mm (inch)

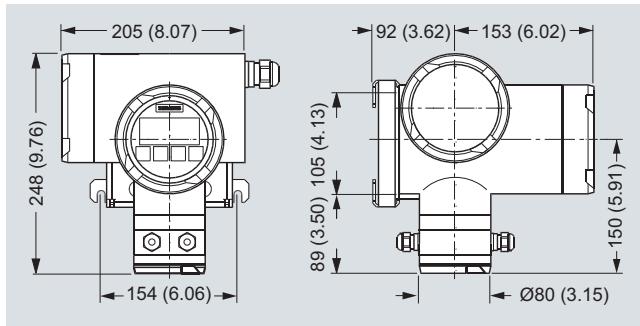

SITRANS FM transmitter TRANSMAG 2 with wall and pipeline mounting bracket, dimensions in mm (inch)

Schematics

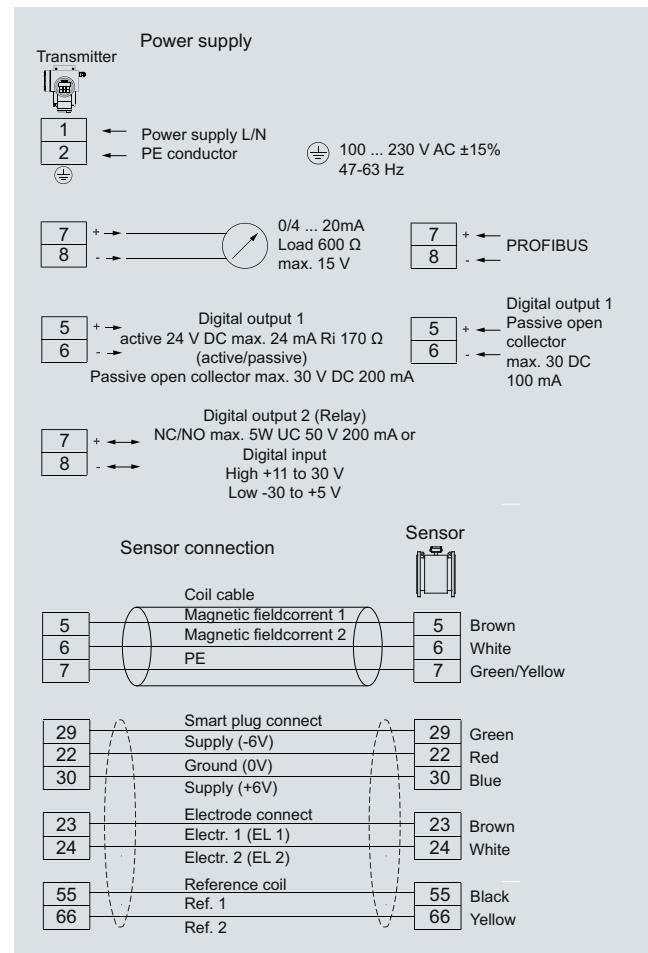

SITRANS FM transmitter TRANSMAG 2, connection diagram

Flow Measurement

SITRANS F M

Transmitter TRANSMAG 2 with sensor 911/E

911/E sensor

Process connection

Nominal diameters	DN 15 ... 1000 (½" ... 40")
Metering tube connections	EN 1092-1, ANSI B16.5, others on request

Rated operating conditions


Installation conditions

• Soft rubber liner	See system information 0 ... 70 °C (32 ... 158 °F)
• Hard rubber liner	0 ... 90 °C (32 ... 194 °F) Option: 100 °C (212 °F)
• PTFE liner	• -20 ... +150 °C (-4 ... +300 °F) at 25 bar (363 psi) • -20 ... +100 °C (-4 ... +212 °F) at 40 bar (580 psi)
• Linatex (rubber)	-40 ... +70 °C (-40 ... +158 °F) (for temperatures below -20 °C (-4 °F) AISI 316 flanges must be used)
• With Novolak liner	130 °C (266 °F) at 40 bar (580 psi)
Degree of protection	IP67/NEMA 4X Optional IP68/NEMA 6

Medium conditions


Minimum conductivity	> 1 µS/cm, on request 0.1 µS/cm depending on medium
Maximum flow velocity	12 m/s (39.4 ft/s)
Full scale value of flow velocity	0.15 ... 12 m/s (0.49 ... 39.4 ft/s)

Protection rings for liners



Function	To protect the edges of liners from abrasion (e.g. gravel, sand etc.). Used mainly with soft rubber liners and for PTFE liners at high temperatures from 100 to 150 °C (212 to 300 °F).
Contact with medium	Yes, please always check resistance to measured medium.
Material	Stainless steel mat. no. 1.4571/316Ti, optionally Hastelloy C276
Material thickness	The overall length of the sensor is increased by • 6 mm for DN 15 to DN 150 (0.24" for ½" to 6") or • 10 mm for DN 200 to DN 600 (0.4" for 8" to 24")
Standard	No, optional for PTFE and soft rubber liners. They are required for PTFE liners of PN 16 (MWP 232 psi) or more instead of protection washers, and must be ordered separately.
Order No.	7ME5912-....

Earthing washers



Function	Electrical reference and earthing of the medium. Required if the pipelines are not electrically conducting or are lined (plastic pipelines, concrete pipelines etc.). All earthing rings must be connected to the earthing screw present on the sensor.
Contact with medium	Yes, please always check resistance to measured medium.
Material	Stainless steel mat. no. 1.4571/316Ti, or Hastelloy C276
Material thickness	The overall length of the sensor is increased by 2 mm (0.08") per earthing ring.
Standard	No, only optional. Required between the medium and sensor for equipotential bonding between non-conducting pipelines or lined pipelines.
Order No.	7ME5902-....

Important:

The rings must be ordered together with the sensor.
In case of replacement please include the sensor MLFB code on the order.

Transmitter TRANSMAG 2 with sensor 911/E
Notes on pressure equipment directive

The devices are designed for liquids of danger group "Gases of fluid group 1". The categories differ according to the version, and are listed in the table below.

The minimum temperature is defined at -10 °C (14 °F) for the flange materials C22.8 (1.0460) and ST52-5 (1.0570).

The minimum temperature is defined at -20 °C (-4 °F) for the flange material 1.4571/316Ti.

Classification according to pressure equipment directive (PED 97/23/EC)

Nominal diameter DN	Nominal pressure PN	Permissible media	Category
15 ... 25 (1/2" ... 1")	10 ... 40 (145 ... 580)	Gases fluid group 1 and liquids fluid group 1	Article 3.3
32 ... 100 (1 1/4" ... 4")	10 (145)	Gases fluid group 1 and liquids fluid group 1	I
32 ... 50 (1 1/4" ... 2")	16 (232)	Gases fluid group 1 and liquids fluid group 1	I
32 ... 40 (1 1/4" ... 1 1/2")	25 (363)	Gases fluid group 1 and liquids fluid group 1	I
100 ... 350 (4" ... 12")	10 (145)	Gases fluid group 1 and liquids fluid group 1	II
65 ... 200 (2 1/2" ... 8")	16 (232)	Gases fluid group 1 and liquids fluid group 1	II
50 ... 125 (2" ... 5")	25 (363)	Gases fluid group 1 and liquids fluid group 1	II
32 ... 80 (1 1/4" ... 3")	40 (580)	Gases fluid group 1 and liquids fluid group 1	II
350 ... 600 (14" ... 24")	10 (145)	Gases fluid group 1 and liquids fluid group 1	III
250 ... 600 (10" ... 24")	16 (232)	Gases fluid group 1 and liquids fluid group 1	III
150 ... 600 (6" ... 24")	25 (363)	Gases fluid group 1 and liquids fluid group 1	III
100 ... 600 (4" ... 24")	40 (580)	Gases fluid group 1 and liquids fluid group 1	III

Flow Measurement

SITRANS F M

Transmitter TRANSMAG 2 with sensor 911/E

Selection and Ordering data		Order No.	Order Code
Flowsensor SITRANS F M 911/E remote version		7ME5610 - ■■■■■ - AA ■■■	
Nominal diameter			
DN 15 (½")	1 V		
DN 25 (1")	2 D		
DN 40 (1½")	2 R		
DN 50 (2")	2 Y		
DN 65 (2½")	3 F		
DN 80 (3")	3 M		
DN 100 (4")	3 T		
DN 125 (5")	4 B		
DN 150 (6")	4 H		
DN 200 (8")	4 P		
DN 250 (10")	4 V		
DN 300 (12")	5 D		
DN 350 (14")	5 K		
DN 400 (16")	5 R		
DN 450 (18")	5 Y		
DN 500 (20")	6 F		
DN 600 (24")	6 P		
DN 700 (28")	6 Y		
DN 750 (30")	7 D		
DN 800 (32")	7 H		
DN 900 (36")	7 M		
DN 1000 (40")	7 R		
Flange norm and pressure rating			
EN 1092-1, PN 10 (DN 200 ... 1000 (8" ... 40"))	B		
EN 1092-1, PN 16 (DN 65 ... 1000 (2½" ... 40"))	C		
EN 1092-1, PN 25 (DN 200 ... 600 (8" ... 24"))	E		
EN 1092-1, PN 40 (DN 15 ... 600 (½" ... 24"))	F		
ANSI B16.5, Class 150 (½" ... 24"), max 19.6 bar (285 psi) at 20 °C (68 °F)	J		
ANSI B16.5, Class 300 (½" ... 24"), max 51.1 bar (741 psi) at 20 °C (68 °F)	K		
AWWA C207 Class D (28" ... 40")	L		
JIS 10 K (½" ... 24")	R		
Flange material			
Mid steel flanges 1.0460/1.0570	1		
Stainless steel flanges, AISI 316 Ti / 1.4571	3		
Liner material			
Soft rubber	1		
PTFE (without protection washers)	3		
Hardrubber	4		
Linatex	5		
Novolak (sealing material FFKM)	6		
Electrode material			
AISI 316 Ti (mat. no. 1.4571/316 Ti)	1		
Hastelloy C276	2		
Platinum head with shaft (mat. no. 1.4571/316Ti)	3		
Titanium	4		
Tantalum	5		
Cable glands/terminal box			
Metric: Polyamide terminal box	1		
½" NPT: Polyamide terminal box	2		

This device is shipped with a Quick Start guide and the SITRANS F manual CD containing the complete manual library. Printed Operating Instructions are available for purchase via PMD


Transmitter TRANSMAG 2 with sensor 911/E

Selection and Ordering data		Order No.	Order code	Selection and Ordering data		Order No.	Order code
SITRANS F M				SITRANS F M			
electromagnetic flowmeter				electromagnetic flowmeter			
Protection rings for flow sensor 911E	(per pair)	7ME5912 -		Earthing rings for flow sensor 911E	(per unit)	7ME5902 -	
Liner				Liner			
Hard rubber/soft rubber		1		Hard rubber/soft rubber		1	
Novolak		7		Novolak		7	
PTFE		0		PTFE		0	
Nominal diameter				Nominal diameter			
<i>for PTFE, mat. no. 1.4571/316 Ti</i>				<i>Mat. no. 1.4571/316 Ti</i>			
DN 15 (1/2")		AA		DN 15 (1/2")		AA	
DN 20 (3/4")		BA		DN 20 (3/4")		BA	
DN 25 (1")		CA		DN 25 (1")		CA	
DN 32 (1 1/4")		DA		DN 32 (1 1/4")		DA	
DN 40 (1 1/2")		EA		DN 40 (1 1/2")		EA	
DN 50 (2")		FA		DN 50 (2")		FA	
DN 65 (2 1/2")		GA		DN 65 (2 1/2")		GA	
DN 80 (3")		HA		DN 80 (3")		HA	
DN 100 (4")		JA		DN 100 (4")		JA	
DN 125 (5")		KA		DN 125 (5")		KA	
DN 150 (6")		LA		DN 150 (6")		LA	
DN 200 (8")		MA		DN 200 (8")		MA	
DN 250 (10")		NA		DN 250 (10")		NA	
DN 300 (12")		PA		DN 300 (12")		PA	
Other nominal diameters: specify in plain text		Z A	J 1 Y	DN 350 (14")		QA	
<i>for Hard/Soft rubber, Novolak, mat. no. 1.471/316 Ti</i>				DN 400 (16")		RA	
DN 15 (1/2")		AB		DN 500 (20")		SA	
DN 20 (3/4")		BB		DN 600 (24")		TA	
DN 25 (1")		CB		DN 700 (28")		UA	
DN 32 (1 1/4")		DB		DN 800 (32")		VA	
DN 40 (1 1/2")		EB		DN 900 (36")		WA	
DN 50 (2")		FB		DN 1000 (40")		XA	
DN 65 (2 1/2")		GB		Other nominal diam.: specify in plain text		Z A	J 1 Y
DN 80 (3")		HB		<i>Material Hastelloy C4/2.4610</i>			
DN 100 (4")		JB		DN 15 (1/2")		AB	
DN 125 (5")		KB		DN 20 (3/4")		BB	
DN 150 (6")		LB		DN 25 (1")		CB	
DN 200 (8")		MB		DN 32 (1 1/4")		DB	
DN 250 (10")		NB		DN 40 (1 1/2")		EB	
DN 300 (12")		PB		DN 50 (2")		FB	
Other nominal diameters: specify in plain text		Z B	J 1 Y	DN 65 (2 1/2")		GB	
Flange design				DN 80 (3")		HB	
Flange to DIN		1		DN 100 (4")		JB	
Flange to ANSI		2		DN 125 (5")		KB	
Flange to JIS		3		DN 150 (6")		LB	
				DN 200 (8")		MB	
				DN 250 (10")		NB	
				DN 300 (12")		PB	
				DN 350 (14")		QB	
				DN 400 (16")		RB	
				DN 500 (20")		SB	
				DN 600 (24")		TB	
				Other nominal diam.: specify in plain text		Z B	J 1 Y
Flange design							
Flange to DIN						1	
Flange to ANSI						2	
Flange to JIS						3	

Flow Measurement

SITRANS F M

Transmitter TRANSMAG 2 with sensor 911/E

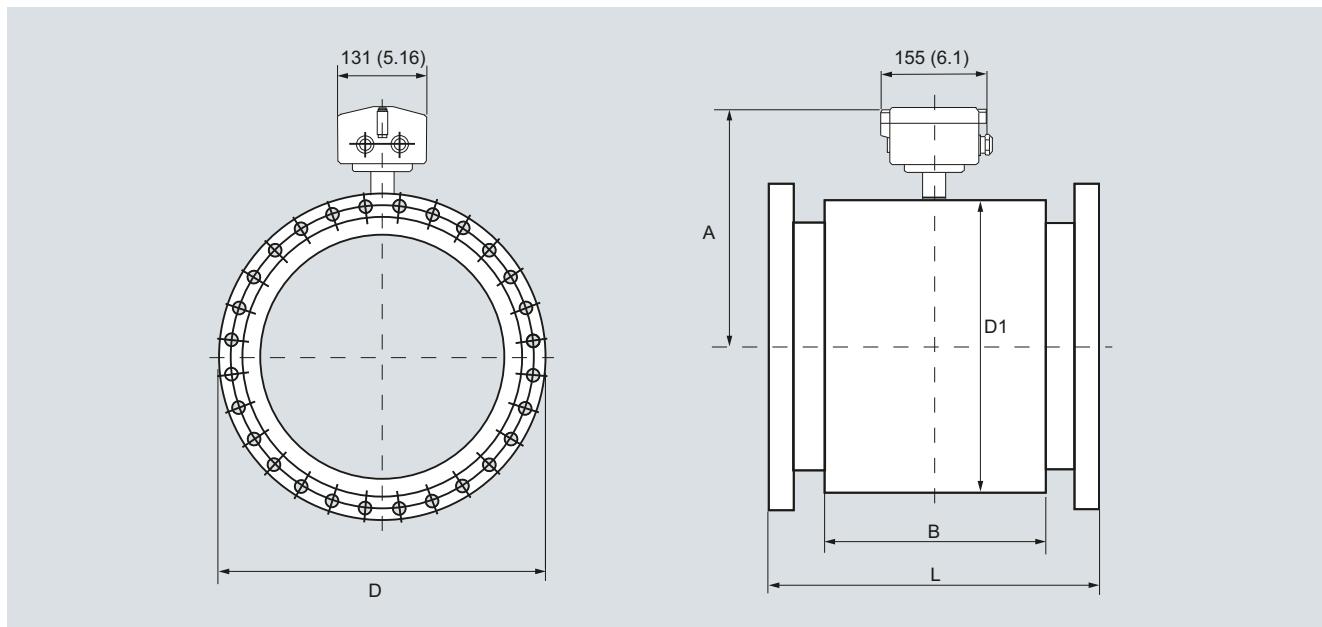

SITRANS F M flow sensor 911/E, remote version, dimensions in mm (inches)

Build-in length 911/E [in mm and inches]

Nominal diameter	DN 15	DN 25	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	DN 250
	1/2"	1"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"
Build-in length L¹⁾											
Hard rubber version		270			330	340		370	410	470	
Linatex/soft rubber version		(10.63)			(12.99)	(13.39)		(14.57)	(16.14)	(18.50)	
PTFE-liner without protection rings		270			330	340		370	410	470	
		(10.63)			(12.99)	(13.39)		(14.57)	(16.14)	(18.50)	
Novolak-version		-		275	325	335	333	362	401	460	
				(10.83)	(12.79)	(13.19)	(13.11)	(14.25)	(15.79)	(18.11)	
Dimensions of sensor housing											
Housing width B					170	(6.69)			240	(9.45)	
Height A		206 (8.11)	222 (8.74)	229 (9.02)	262 (10.32)	274 (10.79)	286 (11.26)	299 (11.78)	334 (13.15)	258 (14.10)	
Housing diameter D ₁		135 (5.35)	167 (6.58)	182 (7.17)	247 (9.73)	272 (10.71)	296 (11.65)	322 (12.68)	392 (15.43)	440 (17.32)	
Weight of PN16 version in kg (MWP 232 psi version in lb) approx.	8.0 (17.64)	8.5 (18.74)	11.5 (25.35)	25.0 (55.12)	26 (57.32)	27 (59.53)	28 (61.73)	34 (74.95)	38 (83.78)	68 (149.9)	81 (178.6)
Nominal diameter	DN 300	DN 350	DN 400	DN 450	DN 500	DN 600	DN 700	DN 750	DN 800	DN 900	DN 1000
	12"	14"	16"	18"	20"	24"	28"	30"	32"	36"	40"
Build-in length L¹⁾											
Hard rubber version	500	550	600	650	650	780		910	1040	1170	1300
Linatex/soft rubber version	(19.68)	(21.65)	(23.62)	(25.59)	(25.59)	(30.71)		(35.83)	(40.95)	(46.06)	(51.18)
PTFE-liner without protection rings	500	550	600	660	650	780					-
	(19.68)	(21.65)	(23.62)	(25.98)	(25.59)	(30.71)					
Novolak-version	489	538	592	638	638	772		903	1033	1163	1293
	(19.25)	(21.18)	(23.31)	(25.12)	(25.12)	(30.39)		(35.55)	(40.63)	(45.79)	(50.91)
Dimensions of sensor housing											
Housing width B	240 (9.45)	225 (8.86)	250 (9.84)	270 (10.63)	300 (11.81)	360 (14.17)		420 (16.54)	500 (19.69)	560 (22.05)	620 (24.41)
Height A	383 (15.08)	375 (14.76)	400 (15.75)	433 (17.05)	453 (17.84)	505 (19.88)	558 (21.97)	590 (23.23)	608 (23.94)	658 (25.91)	713 (28.07)
Housing diameter D ₁	490 (19.29)	474 (18.66)	524 (20.63)	591 (23.26)	629 (24.76)	734 (28.90)	839 (33.03)	904 (35.59)	939 (36.97)	1039 (40.91)	1150 (45.28)
Weight of PN10 Version in kg (MWP 145 psi version in lb) approx.	95 (209.4)	118 (260.2)	161 (354.9)	185 (407.9)	233 (513.7)	401 (884.1)	420 (925.9)	450 (992.1)	500 (1102.3)	560 (1234.6)	620 (1366.9)

¹⁾ Tolerance for build-in lenght: L + 0.0 mm (0.00 inches) /- 4.0 mm (-0.157 inches).

With protection rings or washers for > DN25 + 6.0 mm, > DN200 + 10.0 mm (> 1" + 0.236 inches. > 8" + 0.394 inches)

FINE CONTROLS (UK) LTD



Fine Controls have been supplying process controls & instrumentation equipment since 1994, & now serves an ever expanding customer base, both in the UK & globally.

We offer a full range of valve & instrumentation products & services, with our product range representing leading technologies & brands:

Flow: Flow Meters & Transmitters, Flow Switches, Flow Control Valves & Batch Control Systems

Temperature: Temperature Probes & Thermowells, Temperature Transmitters, Temperature Regulators & Temperature Displays

Level: Level Transmitters & Switches

Pressure: Pressure Gauges & Transmitters, Precision & High Pressure Regulators & I-P Converters, Volume boosters.

Precision Pneumatics: Pressure Regulators, I-P Converters, Volume Boosters, Vacuum Regulators

Valves: Solenoid & Pneumatic Valves, Control Valves & Positioners, Actuated Ball, Globe or Diaphragm Valves & Isolation Valves

Services: Repair, Calibration, Panel Build, System Design & Commissioning

 FAIRCHILD
A rotork® Brand












Solenoid Valves
A rotork® Brand




A rotork® Brand








Baumer Group




CONTROLS
A rotork® Brand

