

# Level Measurement

## Point level measurement - Capacitance switches

**Pointek CLS200 - Standard**

### Overview



Pointek CLS200 (standard version) is a versatile inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces.

### Benefits

- Potted construction protects signal circuit from shock, vibration, humidity and/or condensation
- High chemical resistance
- Level detection independent of tank or pipe earth reference
- Insensitive to product buildup due to high frequency oscillation
- 3 LED indicators for sensor status, output status, and power


### Application

Pointek CLS200 standard version has 3 LED indicators with basic relay and solid-state switch alarms.

The power supply is galvanically isolated and accepts a wide range of voltages (12 to 250 V AC/DC). When used with thermal isolator, the stainless steel and PPS (PVDF optional) materials used in the probe construction provide a temperature rating up to +125 °C (+257 °F) on the process wetted portion of the probe. The switch responds to any material with a dielectric constant of 1.5 or more by detecting a change in oscillating frequency, and it can be set to detect before contact or on contact with the probe. The CLS200 operates independently of the tank wall or pipe so it does not require an external reference electrode for level detection in a non-conductive vessel such as concrete or plastic (EMC regulations applicable in some regions).

- Key Applications: liquids, slurries, powders, granules, pressurized applications, hazardous areas


### Configuration

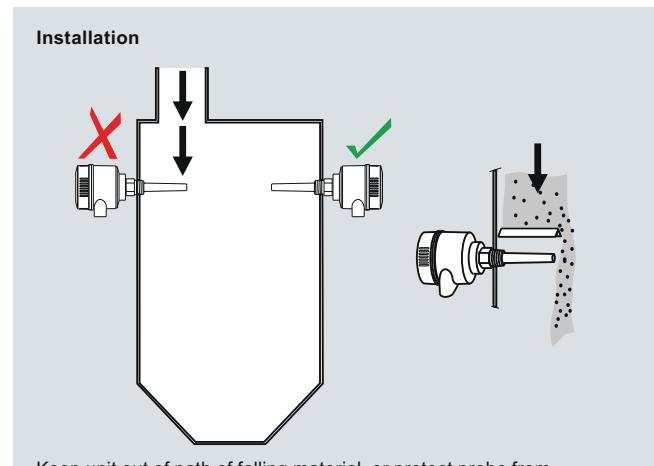

Keep unit out of path of falling material, or protect probe from falling material.



Avoid areas where material build up occurs.

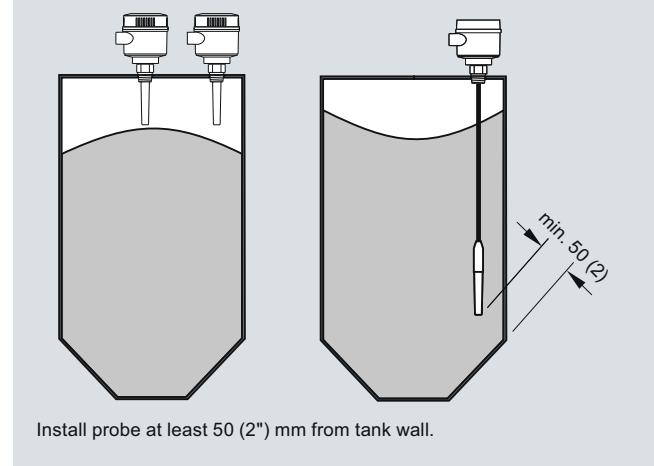

Install probe at least 50 (2") mm from tank wall.

Pointek CLS200 installation, dimensions in mm (inch)

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Standard

#### Technical specifications

Mode of operation	Inverse frequency shift capacitive level detection	Design	
Measuring principle		Material	Epoxy-coated aluminum with gasket
<b>Input</b>		• Enclosure	316L stainless steel
Measured variable	Change in picoFarad (pF)	Connection	Removable terminal block, max. 2.5 mm <sup>2</sup>
<b>Output</b>		Degree of protection	IP65/Type 4/NEMA 4 (optional IP68)
Output signal		Cable inlet	2 x M20x1.5 thread (option: 2 x ½" NPT conduit entry including 1 plugged entry)
• Relay output	1 SPDT Form C relay	Power supply	12 ... 250 V AC/DC, 0 ... 60 Hz max. 2 W
- Max. contact voltage	• 30 V DC	Certificates and approvals	CSA, FM, CE, C-TICK
- Max. contact current	• 250 V AC	General Purpose	ATEX II 1/2 D T100°C
- Max. switching capacity	• 5 A (DC)	Dust Ignition Proof	ATEX II 1 G EEx d[i]a] IIC T6...T4 ATEX II 1/2 D T100°C
- Time delay (ON and/or OFF)	• 8 A (AC)	Flameproof Enclosure With IS Probe	CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
• Solid-state output	150 W (DC)	Dust Ignition Proof with IS Probe	CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
- Output	2000 VA (AC)	Explosion Proof Enclosure With IS Probe	CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
- Protection	1 ... 60 s	Marine	Lloyds Register of Shipping, Categories ENV1, ENV2 and ENV5
- Max. switching voltage	Galvanically isolated	Overfill Protection	WHG (Germany) VLAREM II
- Max. load current	Against reversed polarity (bipolar)	Others	Pattern Approval (China)
- Voltage drop	• 30 V (DC)		
- Time delay (pre or post switching)	• 30 V peak (AC)	<sup>1)</sup> When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 5/34.	
82 mA	82 mA		
< 1 V, typical at 50 mA		<sup>2)</sup> Thermal isolator is used if process connection temperature exceeds +85 °C (+185 °F)	
1 ... 60 s			
<b>Rated operating conditions<sup>1)</sup></b>		<sup>3)</sup> Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 5/34.	
Installation conditions	Indoor/outdoor		
• Location			
Ambient conditions			
• Ambient temperature	-40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>		
• Installation category	II		
• Pollution degree	4		
Medium conditions	Liquids, bulk solids, slurries and interfaces		
• Relative dielectric constant $\epsilon_r$	Min. 1.5		
• Process temperature			
- Without thermal isolator	-40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>		
- With thermal isolator	-40 ... +125 °C (-40 ... +257 °F)		
• Process pressure (rod version)	-1 ... +25 bar g (-14.6 ... +365 psi g) (nominal)		
• Process pressure (cable version) <sup>3)</sup>	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)		
• Process pressure (sliding coupling version)	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)		
Electromagnetic Compatibility	To comply with CE EMC regulations (where applicable); the CLS200 should only be used under these conditions: - Installed in a metallic vessel - Wired with shielded cable - Cable shields are terminated in suitable EMC rated cable glands at the device cable entry point.		

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Standard


<b>Design: Probe</b>	<b>Rod version</b>	<b>Sanitary version</b>	<b>Cable version</b>	<b>Sliding Coupling version</b>
Max. length	5500 mm (216.53")	5500 mm (216.53")	30000 mm (1181.1") liquids and slurries 5000 mm (196.85") solids (under loads)	5500 mm (216.53")
Process connection	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 316L stainless steel ASME/EN flange	1 $\frac{1}{2}$ ", 2" sanitary fitting clamp 316L stainless steel	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 316L stainless steel ASME/EN flange	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]
Extension material	316L stainless steel optional PFA coated <sup>1)</sup>	316L stainless steel	Fluoroethylene propylene (FEP) cable with stainless steel core	316L stainless steel
Sensor wetted parts	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)
O-ring seal material	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>
Thermal isolator <sup>3)</sup>	Optional	Optional	Optional	Optional
Extension	User selected length	User selected length	Cable extension	User selected length

<sup>1)</sup> PFA coating (7ML5634 and 7ML5644) has 120 micron thickness.

<sup>2)</sup> For caustic materials please contact [nacc.smp@siemens.com](mailto:nacc.smp@siemens.com) for alternative O-rings.

<sup>3)</sup> Thermal isolator is used if process connection temperature exceeds +85 °C (+185 °F).

### Options

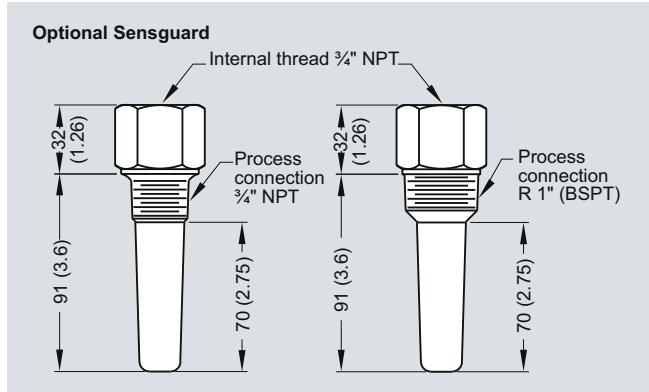

Optional Sensguard, dimensions in mm (inch)

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Standard

Selection and Ordering data		Order No.	Selection and Ordering data	Order No.
<b>Pointek CLS200 - Standard - Rod Version with Threaded or Flanged process connection</b>		C) 7 M L 5 6 3 0 - - - - 0	<b>Pointek CLS200 - Standard - Rod Version with Threaded or Flanged process connection</b>	C) 7 M L 5 6 3 0 - - - - 0
Versatile inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces			Versatile inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces	
<b>Process Connection</b>			<b>Add order code Y01 and plain text:</b> "Insertion length ... mm"	
Threaded, 316L stainless steel			Extended rod, 200 ... 1000 mm (7.87 ... 39.37")	M
3/4" NPT [(Taper), ANSI/ASME B1.20.1]	0 A		Extended rod, 1001 ... 2000 mm (39.41 ... 78.74")	N
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B		Extended rod, 2001 ... 3000 mm (78.78 ... 118.11")	P
1 1/4" NPT [(Taper), ANSI/ASME B1.20.1]	0 C		Extended rod, 3001 ... 4000 mm (118.15 ... 157.48")	Q
1 1/2" NPT [(Taper), ANSI/ASME B1.20.1]	0 D		Extended rod, 4001 ... 5000 mm (157.52 ... 196.85")	R
R 3/4" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A		Extended rod, 5001 ... 5500 mm (196.89 ... 216.53")	S
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B			
R 1 1/2" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D			
G 3/4" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A			
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B			
G 1 1/2" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D			
Welded flange, 316L stainless steel, raised face				
1" ASME, 150 lb	5 A			
1" ASME, 300 lb	5 B			
1" ASME, 600 lb	5 C			
1 1/2" ASME, 150 lb	5 D			
1 1/2" ASME, 300 lb	5 E			
1 1/2" ASME, 600 lb	5 F			
2" ASME, 150 lb	5 G			
2" ASME, 300 lb	5 H			
2" ASME, 600 lb	5 J			
3" ASME, 150 lb	5 K			
3" ASME, 300 lb	5 L			
3" ASME, 600 lb	5 M			
4" ASME, 150 lb	5 N			
4" ASME, 300 lb	5 P			
4" ASME, 600 lb	5 Q			
Welded flange, 316L stainless steel, Type A flat faced				
DN 25, PN 16	6 A			
DN 25, PN 40	6 B			
DN 40, PN 16	6 C			
DN 40, PN 40	6 D			
DN 50, PN 16	6 E			
DN 50, PN 40	6 F			
DN 80, PN 16	6 G			
DN 80, PN 40	6 H			
DN 100, PN 16	6 J			
DN 100, PN 40	6 K			
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)				
<b>Probe length</b> (length from flange face) (threaded lengths include process thread)		A		
Note: No Y01 needed in order code for standard lengths		B		
Compact [threaded 120 mm (4.72")], Flanged 98 mm (3.86")]		C		
Extended rod, 250 mm (9.84")		D		
Extended rod, 350 mm (13.78")		E		
Extended rod, 500 mm (19.69")		F		
Extended rod, 750 mm (29.53")		G		
Extended rod, 1000 mm (39.37")		H		
Extended rod, 1250 mm (49.21")		J		
Extended rod, 1350 mm (53.15")		K		
Extended rod, 1500 mm (59.06")		L		
Extended rod, 1750 mm (68.90")				
Extended rod, 2000 mm (78.74")				
			C) Subject to export regulations AL: N, ECCN: EAR99	

# Level Measurement

## Point level measurement - Capacitance switches

Pointek CLS200 - Standard

Selection and Ordering data	Order code
<b><i>Further designs</i></b>	
Please add "-Z" to Order No. and specify Order code(s).	
Total insertion length: enter the total insertion length in plain text description	<b>Y01</b>
Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text	<b>Y15</b>
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	<b>C11</b>
Inspection Certificate Type 3.1 per EN 10204	<b>C12</b>
<b><i>Operating Instructions</i></b>	
Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.	<b>See page 5/33</b>
<b><i>Accessories</i></b>	<b>See page 5/33</b>

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Standard

<b>Selection and Ordering data</b>		<b>Order No.</b>
<b>Pointek CLS200 - Standard - Cable Version with Threaded or Flanged process connection</b>		C) 7 M L 5 6 3 1 - - - - 0
Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces		
<b>Process Connection</b>		
Threaded, 316L stainless steel		
¾" NPT [(Taper), ANSI/ASME B1.20.1]	0 A	
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B	
1¼" NPT [(Taper), ANSI/ASME B1.20.1]	0 C	
1½" NPT [(Taper), ANSI/ASME B1.20.1]	0 D	
R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A	
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B	
R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D	
G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A	
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B	
G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D	
<b>Welded flange, 316L stainless steel, raised face</b>		
1" ASME, 150 lb	5 A	
1" ASME, 300 lb	5 B	
1" ASME, 600 lb	5 C	
1½" ASME, 150 lb	5 D	
1½" ASME, 300 lb	5 E	
1½" ASME, 600 lb	5 F	
2" ASME, 150 lb	5 G	
2" ASME, 300 lb	5 H	
2" ASME, 600 lb	5 J	
3" ASME, 150 lb	5 K	
3" ASME, 300 lb	5 L	
3" ASME, 600 lb	5 M	
4" ASME, 150 lb	5 N	
4" ASME, 300 lb	5 P	
4" ASME, 600 lb	5 Q	
<b>Welded flange, 316L stainless steel, Type A flat faced</b>		
DN 25, PN 16	6 A	
DN 25, PN 40	6 B	
DN 40, PN 16	6 C	
DN 40, PN 40	6 D	
DN 50, PN 16	6 E	
DN 50, PN 40	6 F	
DN 80, PN 16	6 G	
DN 80, PN 40	6 H	
DN 100, PN 16	6 J	
DN 100, PN 40	6 K	
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)		
<b>Probe length</b> (length from flange face) (threaded lengths include process thread)		
Note: No Y01 needed in order code for standard lengths		
Extended cable, 3000 mm (118.11"), length can be determined by customer on assembly	A	
Extended cable, 6000 mm (236.22"), length can be determined by customer on assembly	B	
Add order code Y01 and plain text: "Insertion length ... mm"	C	
Extended cable, 500 ... 5000 mm (19.69 ... 196.85")	D	
Extended cable, 5001 ... 10000 mm (196.89 ... 393.70")	E	
Extended cable, 10001 ... 15000 mm (393.74 ... 590.55")	F	
Extended cable, 15001 ... 20000 mm (590.59 ... 787.4")	G	
Extended cable, 20001 ... 25000 mm (787.44 ... 984.25")	H	
Extended cable, 25001 ... 30000 mm (984.29 ... 1181.1")		

<b>Selection and Ordering data</b>		<b>Order No.</b>
<b>Pointek CLS200 - Standard - Cable Version with Threaded or Flanged process connection</b>		C) 7 M L 5 6 3 1 - - - - 0
Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces		
<b>Thermal Isolator</b>		
Without thermal isolator		0
With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]		1
<b>Remote mount electronics and mounting bracket</b>		
With 2 m (79") of cable		2
With 5 m (197") of cable		3
<b>Wetted Seals</b>		
FKM and PTFE		0
FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]		1
<b>Probe Material</b>		
FEP jacketed cable with PPS probe body		0
FEP jacketed cable with PVDF probe body		1
<b>Approvals</b>		
Dust Ignition Proof: CE, C-TICK, ATEX II 1/2 D T100 °C		C
Flameproof Enclosure with IS Probe: CE, C-TICK, ATEX II 1 G EEx d[ia] IIC T6...T4, ATEX II 1/2 D T100 °C		D
Flameproof Enclosure with IS Probe, with WHG approval: CE, C-TICK, ATEX II 1/2 G EEx d[ia] IIC T6...T4, ATEX II 1/2 D T100 °C		E
Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4		F
Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4		G
General Purpose (CSA, FM)		H
General Purpose (CE, C-TICK)		J
General Purpose (CSA, FM, CE, C-TICK) with WHG approval		K
<b>Enclosure and Lid</b>		
Aluminum epoxy coated		
2 x ½" NPT via adapter - cable inlet, IP65		A
2 x M20x1.5 cable inlet, IP65		B
2 x ½" NPT via adapter - cable inlet, IP68		C
2 x M20x1.5 cable inlet, IP68		D

<b>Selection and Ordering data</b>		<b>Order code</b>
<i>Further designs</i>		
Please add "-Z" to Order No. and specify Order code(s).		
Total insertion length: enter the total insertion length in plain text description		Y01
Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text		Y15
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000		C11
Inspection Certificate Type 3.1 per EN 10204		C12
<i>Operating Instructions</i>		
Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.		See page 5/33
<i>Accessories</i>		See page 5/33

C)Subject to export regulations AL: N, ECCN: EAR99

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Standard

<b>Selection and Ordering data</b>		<b>Order No.</b>	<b>Selection and Ordering data</b>	<b>Order No.</b>
<b>Pointek CLS200 - Standard - Rod with Sanitary process connection</b>		C) 7 M L 5 6 3 2 - 0	<b>Pointek CLS200 - Standard - Rod with Sanitary process connection</b>	C) 7 M L 5 6 3 2 - 0
Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces			Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces	
<b>Process Connection</b>			<b>Approvals</b>	
<u>Sanitary 316L stainless steel</u>			Dust Ignition Proof: CE, C-TICK, ATEX II 1/2 D T100 °C	C
1" sanitary fitting clamp	8 A		Flameproof Enclosure with IS Probe: CE, C-TICK, ATEX II 1 G EEx d[ia] IIC T6...T4, ATEX II 1/2 D T100 °C	D
1½" sanitary fitting clamp	8 B		Flameproof Enclosure with IS Probe, with WHG approval: CE, C-TICK, ATEX II 1/2 G EEx d[ia] IIC T6...T4, ATEX II 1/2 D T100 °C	E
2" sanitary fitting clamp	8 C		Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4	F
2½" sanitary fitting clamp	8 D		Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4	G
3" sanitary fitting clamp	8 E		General Purpose (CSA, FM) General Purpose (CE, C-TICK)	H
(Note: Sanitary connection dimensionally corresponds to the applicable ISO 2852 standard)			General Purpose (CSA, FM, CE, C-TICK) with WHG approval	J
<b>Probe length</b> (length from process connection face)	A			K
<u>Note: No Y01 needed in order code for standard lengths</u>	B		<b>Enclosure and Lid</b>	
Compact 98 mm (3.86")	C		<u>Aluminum epoxy coated</u>	
Extended rod, 250 mm (9.84")	D		2 x ½" NPT via adapter - cable inlet, IP65	A
Extended rod, 350 mm (13.78")	E		2 x M20x1.5 cable inlet, IP65	B
Extended rod, 500 mm (19.69")	F		2 x ½" NPT via adapter - cable inlet, IP68	C
Extended rod, 750 mm (29.53")	G		2 x M20x1.5 cable inlet, IP68	D
Extended rod, 1000 mm (39.37")	H			
Extended rod, 1250 mm (49.21")	I		C) Subject to export regulations AL: N, ECCN: EAR99	
Extended rod, 1350 mm (53.15")	J			
Extended rod, 1500 mm (59.06")	K			
Extended rod, 1750 mm (68.90")	L			
Extended rod, 2000 mm (78.74")	M			
Add order code Y01 and plain text:	N			
"Insertion length ... mm"	P			
Extended rod, 110 ... 350 mm (4.3 ... 13.78")	Q			
Extended rod, 351 ... 1000 mm (13.82 ... 39.33")	R			
Extended rod, 1001 ... 2000 mm (39.41 ... 78.74")	S			
Extended rod, 2001 ... 3000 mm (78.78 ... 118.11")	T			
Extended rod, 3001 ... 4000 mm (118.15 ... 157.48")	0		<b>Selection and Ordering data</b>	Order code
Extended rod, 4001 ... 5000 mm (157.52 ... 196.85")	1		<b>Further designs</b>	
Extended rod, 5001 ... 5500 mm (196.89 ... 216.53")	2		Please add "-Z" to Order No. and specify Order code(s).	
<b>Thermal Isolator</b>	3		Total insertion length: enter the total insertion length in plain text description	<b>Y01</b>
Without thermal isolator	0		Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text	<b>Y15</b>
With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]	1		Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	<b>C11</b>
<b>Remote mount electronics and mounting bracket</b>	2		Inspection Certificate Type 3.1 per EN 10204	<b>C12</b>
Remote mount electronics with 2 m (79") of cable	3		<b>Operating Instructions</b>	
Remote mount electronics with 5 m (197") of cable	0		Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.	<b>See page 5/33</b>
<b>Wetted Seals</b>	1			
FKM	0		<b>Accessories</b>	<b>See page 5/33</b>
FFKM	1			
[for process temperatures above -20 °C (-4 °F)]				
<b>Probe Material</b>				
316L Stainless Steel with PPS probe body				
316L Stainless Steel with PVDF probe body				

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Standard

Selection and Ordering data		Order No.	Selection and Ordering data	Order No.
<b>Pointek CLS200 - Standard - Sliding Coupling with Threaded process connection</b>		C) 7 M L 5 6 3 3 - 0	<b>Pointek CLS200 - Standard - Sliding Coupling with Threaded process connection</b>	C) 7 M L 5 6 3 3 - 0
Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces			Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces	
<b>Process Connection</b>			<b>Approvals</b>	
Threaded, 316L stainless steel			Dust Ignition Proof: CE, C-TICK, ATEX II 1/2 D T100 °C	C
¾" NPT [(Taper), ANSI/ASME B1.20.1]	0 A		Flameproof Enclosure with IS Probe: CE, C-TICK, ATEX II 1 G EEx d[ia] IIC T6...T4, ATEX II 1/2 D T100 °C	D
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B		Flameproof Enclosure with IS Probe, with WHG approval: CE, C-TICK, ATEX II 1/2 G EEx d[ia] IIC T6...T4, ATEX II 1/2 D T100 °C	E
1¼" NPT [(Taper), ANSI/ASME B1.20.1]	0 C		Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4	F
1½" NPT [(Taper), ANSI/ASME B1.20.1]	0 D		Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4	G
R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A		General Purpose (CSA, FM)	H
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B		General Purpose (CE, C-TICK)	J
R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D		General Purpose (CSA, FM, CE, C-TICK) with WHG approval	K
G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A			
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B		<b>Enclosure and Lid</b>	
G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D		Aluminum epoxy coated 2 x ½" NPT via adapter - cable inlet, IP65 2 x M20x1.5 cable inlet, IP65 2 x ½" NPT via adapter - cable inlet, IP68 2 x M20x1.5 cable inlet, IP68	A
<b>Probe length</b> (length from flange face) (threaded lengths include process thread)				B
<u>Note: No Y01 needed in order code for standard lengths</u>				C
Extended rod, 350 mm (13.78")	C			D
Extended rod, 500 mm (19.69")	D			
Extended rod, 750 mm (29.53")	E			
Extended rod, 1000 mm (39.37")	F			
Extended rod, 1250 mm (49.21")	G			
Extended rod, 1350 mm (53.15")	H			
Extended rod, 1500 mm (59.06")	J			
Extended rod, 1750 mm (68.90")	K			
Extended rod, 2000 mm (78.74")	L			
Add order code Y01 and plain text: "Insertion length ... mm"	M			
Extended rod, 350 ... 1000 mm (13.82 ... 39.33")	N			
Extended rod, 1001 ... 2000 mm (39.41 ... 78.74")	P			
Extended rod, 2001 ... 3000 mm (78.78 ... 118.11")				
Extended rod, 3001 ... 4000 mm (118.15 ... 157.48")	Q			
Extended rod, 4001 ... 5000 mm (157.52 ... 196.85")	R			
Extended rod, 5001 ... 5500 mm (196.89 ... 216.53")	S			
<b>Thermal Isolator</b>	0			
Without thermal isolator	1			
With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]				
<b>Remote mount electronics and mounting bracket</b>	2			
With 2 m (79") of cable	3			
With 5 m (197") of cable				
<b>Wetted Seals</b>	0			
FKM and PTFE	1			
FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]				
<b>Probe Material</b>	0			
316L Stainless Steel with PPS probe body	1			
316L Stainless Steel with PVDF probe body				
<b>Accessories</b>			<b>Operating Instructions</b>	See page 5/33
<b>Further designs</b>			Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.	See page 5/33
<b>Selection and Ordering data</b>			<b>Accessories</b>	See page 5/33
<b>Selection and Ordering data</b>				

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Standard

<b>Selection and Ordering data</b>		<b>Order No.</b>	<b>Selection and Ordering data</b>	<b>Order No.</b>
<b>Pointek CLS200 - Standard - PFA Coated Rod with PFA Coated Flanged process connection</b>		C) 7 M L 5 6 3 4 - 0	<b>Pointek CLS200 - Standard - PFA Coated Rod with PFA Coated Flanged process connection</b>	C) 7 M L 5 6 3 4 - 0
Versatile inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces			Versatile inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces	
<b>Process Connection</b>			<b>Thermal Isolator</b>	
<u>Welded flange, 316L stainless steel, raised face</u>			Without thermal isolator	0
1" ASME, 150 lb	5 A		With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]	1
1" ASME, 300 lb	5 B			
1" ASME, 600 lb	5 C			
1½" ASME, 150 lb	5 D		<b>Remote mount electronics and mounting bracket</b>	
1½" ASME, 300 lb	5 E		With 2 m (79") of cable	2
1½" ASME, 600 lb	5 F		With 5 m (197") of cable	3
2" ASME, 150 lb	5 G			
2" ASME, 300 lb	5 H			
2" ASME, 600 lb	5 J			
3" ASME, 150 lb	5 K		<b>Wetted Seals</b>	
3" ASME, 300 lb	5 L		FKM	0
3" ASME, 600 lb	5 M		FFKM [for process temperatures above -20°C (-4°F)]	1
4" ASME, 150 lb	5 N			
4" ASME, 300 lb	5 P		<b>Probe Material</b>	
4" ASME, 600 lb	5 Q		PFA Coated 316L Stainless Steel with PPS probe body	0
<u>Welded flange, 316L stainless steel, Type A flat faced</u>			PFA Coated 316L Stainless Steel with PVDF probe body	1
DN 25, PN 16	6 A			
DN 25, PN 40	6 B		<b>Approvals</b>	
DN 40, PN 16	6 C		Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Gr. E, F, G CSA/IEC Ex Class III T4	F
DN 40, PN 40	6 D		Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/IEC Ex Class II, Div. 1, Gr. E, F, G CSA/IEC Ex Class III T4	G
DN 50, PN 16	6 E			
DN 50, PN 40	6 F		General Purpose (CSA, FM)	H
DN 80, PN 16	6 G			
DN 80, PN 40	6 H		<b>Enclosure and Lid</b>	
DN 100, PN 16	6 J		Aluminum epoxy coated	
DN 100, PN 40	6 K		2 x ½" NPT via adapter - cable inlet, IP65 2 x M20x1.5 cable inlet, IP65 2 x ½" NPT via adapter - cable inlet, IP68 2 x M20x1.5 cable inlet, IP68	A B C D
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)				
<b>Probe length</b> (length from flange face) (threaded lengths include process thread)			C) Subject to export regulations AL: N, ECCN: EAR99	
<u>Note: No Y01 needed in order code for standard lengths</u>				
Compact (Threaded 98 mm (3.86"))	A			
Extended rod, 250 mm (9.84")	B			
Extended rod, 350 mm (13.78")	C			
Extended rod, 500 mm (19.69")	D			
Extended rod, 750 mm (29.53")	E			
Extended rod, 1000 mm (39.37")	F			
Extended rod, 1250 mm (49.21")	G			
Extended rod, 1350 mm (53.15")	H			
Extended rod, 1500 mm (59.06")	J			
Extended rod, 1750 mm (68.90")	K			
Extended rod, 2000 mm (78.74")	L			
<u>Add order code Y01 and plain text:</u>	M			
"Insertion length ... mm"	N			
Extended rod, 200 ... 1000 mm (7.87 ... 39.33")	P			
Extended rod, 1001 ... 2000 mm (39.41 ... 78.74")	Q			
Extended rod, 2001 ... 3000 mm (78.78 ... 118.11")	R			
Extended rod, 3001 ... 4000 mm (118.15 ... 157.48")	S			
Extended rod, 4001 ... 5000 mm (157.52 ... 196.85")				
Extended rod, 5001 ... 5500 mm (196.89 ... 216.53")				

<b>Selection and Ordering data</b>	<b>Order code</b>
<b>Further designs</b>	
Please add "-Z" to Order No. and specify Order code(s).	
Total insertion length: enter the total insertion length in plain text description	<b>Y01</b>
Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text	<b>Y15</b>
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	<b>C11</b>
Inspection Certificate Type 3.1 per EN 10204	<b>C12</b>
<b>Operating Instructions</b>	
Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.	<b>See page 5/33</b>
<b>Accessories</b>	<b>See page 5/33</b>

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Digital

#### Overview



5

Pointek CLS200 (digital version) is a versatile inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces. The digital version includes PROFIBUS PA, an LCD display, and advanced diagnostic features.

#### Benefits

- Potted construction protects signal circuit from shock, vibration, humidity and/or condensation
- High chemical resistance
- Level detection independent of tank or pipe earth reference
- Insensitive to product buildup due to high frequency oscillation
- High sensitivity allows installation in a wide range of liquids, solids or slurry applications
- Integral LCD display allows for easy menu-driven setup
- PROFIBUS PA communication (SIMATIC PDM compatible)

#### Application

Pointek CLS200 digital version provides an integral LCD display for stand-alone use, and also provides PROFIBUS PA communication (Profile version 3.0, Class B) for connection to a network.


The power supply is galvanically isolated and accepts a wide range of voltages (12 to 30 V DC). When used with thermal isolator, the stainless steel and PPS (PVDF optional) materials used in the probe construction provide a temperature rating up to +125 °C (+257 °F) on the process wetted portion of the probe. The switch responds to any material with a dielectric constant of 1.5 or more by detecting a change in oscillating frequency, and it can be set to detect before contact or on contact with the probe. The menu-driven setup allows precise control of the switch point signal damping and alarm functions.

When connected to the PROFIBUS network, advanced diagnostics and set up using SIMATIC PDM are possible.

The CLS200 operates independently of the tank wall or pipe so it does not require an external reference electrode for level detection in a non-conductive vessel such as concrete or plastic (EMC regulations applicable in some regions).

- Key Applications: liquids, slurries, powders, granules, pressurized applications, hazardous areas

#### Configuration

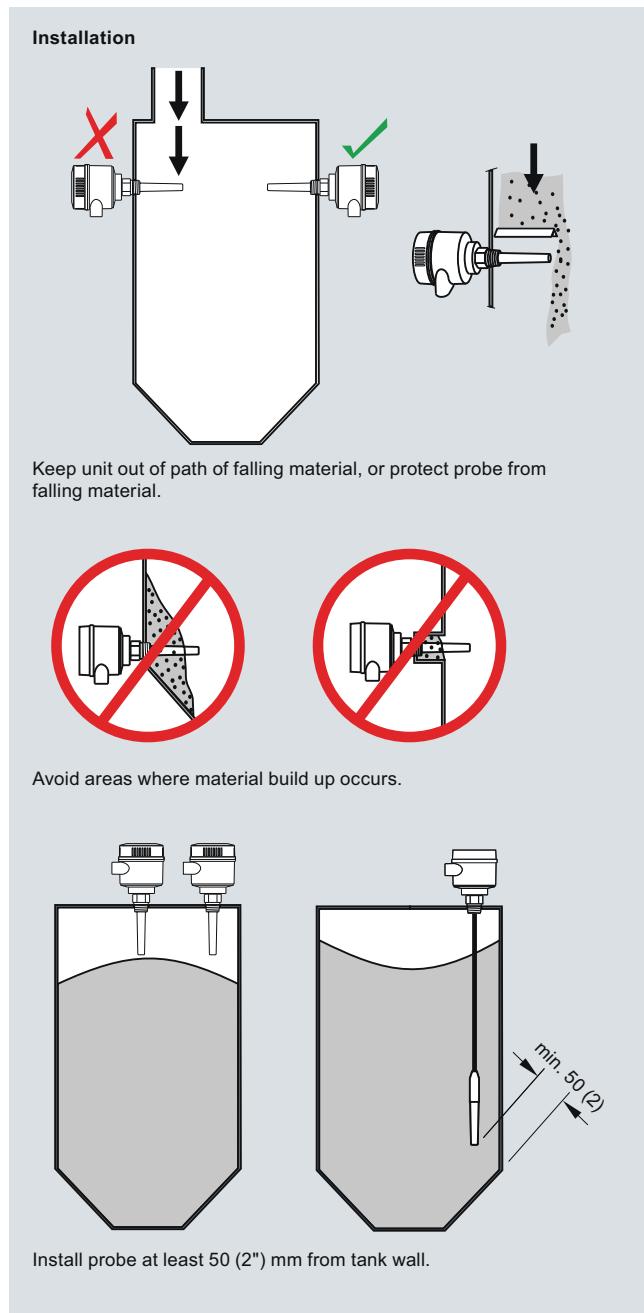

Pointek CLS200 installation, dimensions in mm (inch)

# Level Measurement

## Point level measurement - Capacitance switches

Pointek CLS200 - Digital

### Technical specifications

<b>Mode of operation</b>		<b>Power supply</b>
Measuring principle	Inverse frequency shift capacitive level detection	Bus voltage Standard: 12 ... 30 V DC Intrinsically Safe: 12 ... 24 V DC 12.5 mA
<b>Input</b>		<b>Certificates and approvals</b>
Measured variable	Change in picoFarad (pF)	General Purpose CSA, FM, CE, C-TICK
<b>Output</b>		Dust Ignition Proof ATEX II 1/2 D T100 °C
Output signal		Dust Ignition Proof with IS Probe CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
• Solid-state output	Galvanically isolated	Flameproof Enclosure with IS Probe ATEX II 1/2 G EEx d[ia] IIC T6...T4 ATEX II 1/2 D T100 °C
- Output		Explosion Proof with IS Probe CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
- Protection	Against reversed polarity (bipolar)	Intrinsically Safe <sup>4)</sup> ATEX II 1 G EEx ia IIC T6 ... T4 ATEX II 1/2 D IP6X T100 °C CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
- Max. switching voltage	• 30 V (DC) • 30 V peak (AC)	Non-incendive CSA/FM Class I, Div. 2, Gr. A, B, C, D CSA/FM Class II, Div. 2, Gr. F, G CSA/FM Class III T4 or T6
- Max. load current	82 mA	Non-Sparking ATEX II 3 G Ex nA II T6...T4 ATEX II 2 D IP6X T100 °C
- Voltage drop	< 1 V, typical at 50 mA	Marine Lloyds Register of Shipping, Categories ENV1, ENV2 and ENV5
- Time delay (ON and/or OFF)	Programmable by user (0 ... 100 s)	Others Pattern Approval (China)
• Fail-safe mode	Min. or max	
• Connection	Removable terminal block	
<b>Rated operating conditions</b> <sup>1)</sup>		<b>Communication</b>
Installation conditions	Indoor/outdoor	PROFIBUS PA (IEC 61158 CPF3 CP3/2) Bus physical layer: IEC 61158-2 MBP (IS) Device profile: PROFIBUS PA profile for Process Control Devices Version 3.0, Class B FISCO field device
• Location		
Ambient conditions		
• Ambient temperature	-40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>	
• Installation category	II	
• Pollution degree	4	
Medium conditions	Liquids, bulk solids, slurries and interfaces	
• Relative dielectric constant $\epsilon_r$	Min. 1.5	
• Process temperature		
- Without thermal isolator	-40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>	
- With thermal isolator	-40 ... +125 °C (-40 ... +257 °F)	
• Process pressure (rod version)	-1 ... +25 bar g (-14.6 ... +365 psi g) (nominal)	
• Process pressure (cable version) <sup>3)</sup>	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)	
• Process pressure (sliding coupling version)	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)	
<b>Design</b>		
Material		
• Enclosure	Epoxy-coated aluminum with gas- ket	
• Optional thermal isolator	316L stainless steel	
Connection	Removable terminal block, max. 2.5 mm <sup>2</sup>	
Degree of protection	IP65/Type 4/NEMA 4 (optional IP68)	
Cable inlet	2 x M20x1.5 thread (option: 2 x ½" NPT conduit entry including 1 plugged entry)	
Electromagnetic Compatibility	To comply with CE EMC regulations (where applicable); the CLS200 should only be used under these conditions: <ul style="list-style-type: none"><li>- Installed in a metallic vessel</li><li>- Wired with shielded cable</li><li>- Cable shields are terminated in suitable EMC rated cable glands at the device cable entry point.</li></ul>	

<sup>1)</sup> When operation is in areas classified as hazardous, observe restrictions according to relevant certificate.  
See also Pressure/Temperature curves on page 5/34.

<sup>2)</sup> Thermal isolator is used if process connection temperature exceeds +85 °C (+185 °F)

<sup>3)</sup> Pressure rating of process seal is temperature dependent.  
See Pressure/Temperature curves on page 5/34.

<sup>4)</sup> Barrier or Intrinsically safe power supply required for Intrinsically Safe protection

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Digital

Design: Probe	Rod version	Sanitary version	Cable version	Sliding Coupling version
Max. length	5500 mm (216.53")	5500 mm (216.53")	30000 mm (1181.1") liquids and slurries 5000 mm (196.85") solids (under loads)	5500 mm (216.53")
Process connection	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 316L stainless steel ASME/EN flange	1 $\frac{1}{2}$ ", 2" sanitary fitting clamp 316L stainless steel	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 316L stainless steel ASME/EN flange	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]
Extension material	316L stainless steel optional PFA coated <sup>1)</sup>	316L stainless steel	Fluoroethylene propylene (FEP) cable with stainless steel core	316L stainless steel
Sensor wetted parts	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)
O-ring seal material	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>
Thermal isolator <sup>3)</sup>	Optional	Optional	Optional	Optional
Extension	User selected length	User selected length	Cable extension	User selected length


<sup>1)</sup> PFA coating (7ML5634 and 7ML5644) has 120 micron thickness

<sup>2)</sup> For Caustic Materials please contact [nacc.smp@siemens.com](mailto:nacc.smp@siemens.com) for alternative O-rings

<sup>3)</sup> Thermal isolator is used if process connection temperature exceeds +85 °C (+185 °F).

5

### Options

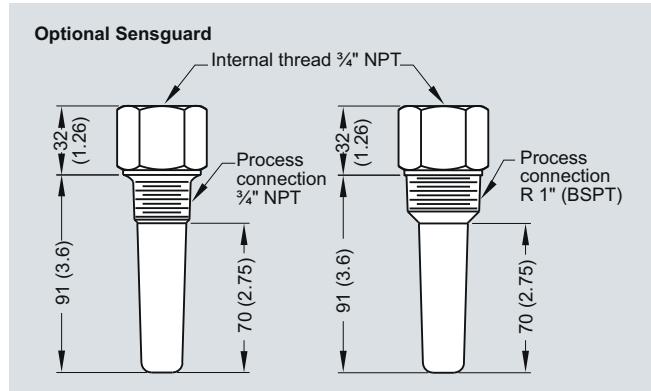

Optional Sensguard, dimensions in mm (inch)

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Digital

<b>Selection and Ordering data</b>		<b>Order No.</b>	<b>Selection and Ordering data</b>	<b>Order No.</b>
<b>Pointek CLS200 - Digital - Rod with Threaded or Flanged process connection</b>		7 M L 5 6 4 0 - 0	<b>Pointek CLS200 - Digital - Rod with Threaded or Flanged process connection</b>	7 M L 5 6 4 0 - 0
Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces			Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces	
<b>Process Connection</b>				
Threaded, 316L stainless steel				
¾" NPT [(Taper), ANSI/ASME B1.20.1]	0 A		Extended rod, 200 ... 1000 mm (7.87 ... 39.37")	M
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B		Extended rod, 1001 ... 2000 mm (39.41 ... 78.74")	N
1¼" NPT [(Taper), ANSI/ASME B1.20.1]	0 C		Extended rod, 2001 ... 3000 mm (78.78 ... 118.11")	P
1½" NPT [(Taper), ANSI/ASME B1.20.1]	0 D		Extended rod, 3001 ... 4000 mm (118.15 ... 157.48")	Q
R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A		Extended rod, 4001 ... 5000 mm (157.52 ... 196.85")	R
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B		Extended rod, 5001 ... 5500 mm (196.89 ... 216.53")	S
R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D			
G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A			
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B			
G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D			
Welded flange, 316L stainless steel, raised face				
1" ASME, 150 lb	5 A			
1" ASME, 300 lb	5 B			
1" ASME, 600 lb	5 C			
1½" ASME, 150 lb	5 D			
1½" ASME, 300 lb	5 E			
1½" ASME, 600 lb	5 F			
2" ASME, 150 lb	5 G			
2" ASME, 300 lb	5 H			
2" ASME, 600 lb	5 J			
3" ASME, 150 lb	5 K			
3" ASME, 300 lb	5 L			
3" ASME, 600 lb	5 M			
4" ASME, 150 lb	5 N			
4" ASME, 300 lb	5 P			
4" ASME, 600 lb	5 Q			
Welded flange, 316L stainless steel, Type A flat faced				
DN 25, PN 16	6 A			
DN 25, PN 40	6 B			
DN 40, PN 16	6 C			
DN 40, PN 40	6 D			
DN 50, PN 16	6 E			
DN 50, PN 40	6 F			
DN 80, PN 16	6 G			
DN 80, PN 40	6 H			
DN 100, PN 16	6 J			
DN 100, PN 40	6 K			
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)				
<b>Probe length (length from flange face)</b> (threaded lengths include process thread)				
<b>Note: No Y01 needed in order code for standard lengths</b>				
Compact [threaded 120 mm (4.72")], Flanged 98 mm (3.86")]	A			
Extended rod, 250 mm (9.84")	B			
Extended rod, 350 mm (13.78")	C			
Extended rod, 500 mm (19.69")	D			
Extended rod, 750 mm (29.53")	E			
Extended rod, 1000 mm (39.37")	F			
Extended rod, 1250 mm (49.21")	G			
Extended rod, 1350 mm (53.15")	H			
Extended rod, 1500 mm (59.06")	J			
Extended rod, 1750 mm (68.90")	K			
Extended rod, 2000 mm (78.74")	L			
<b>Enclosure and Lid</b>				
Aluminum epoxy coated				
2 x ½" NPT via adapter - cable inlet, IP65				A
2 x M20x1.5 cable inlet, IP65				B
2 x ½" NPT via adapter - cable inlet, IP68				C
2 x M20x1.5 cable inlet, IP68				D

<sup>1)</sup> Barrier or Intrinsically safe power supply required for Intrinsically Safe protection

C) Subject to export regulations AL: N, ECCN: EAR99

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Digital

Selection and Ordering data	Order code	Selection and Ordering data	Order No.
<b>Further designs</b>		<b>Pointek CLS200 - Digital - Cable with Threaded or Flanged process connection</b>	C) 7 M L 5 6 4 1 - 0
Please add "-Z" to Order No. and specify Order code(s).		Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces	
Total insertion length: enter the total insertion length in plain text description	<b>Y01</b>	<b>Process Connection</b>	
Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text	<b>Y15</b>	Threaded, 316L stainless steel	
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	<b>C11</b>	¾" NPT [(Taper), ANSI/ASME B1.20.1]	<b>0 A</b>
Inspection Certificate Type 3.1 per EN 10204	<b>C12</b>	1" NPT [(Taper), ANSI/ASME B1.20.1]	<b>0 B</b>
<b>Operating Instructions</b>	<b>See page 5/33</b>	1¼" NPT [(Taper), ANSI/ASME B1.20.1]	<b>0 C</b>
Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.		1½" NPT [(Taper), ANSI/ASME B1.20.1]	<b>0 D</b>
<b>Accessories</b>	<b>See page 5/33</b>	R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	<b>1 A</b>
		R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	<b>1 B</b>
		R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	<b>1 D</b>
		G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	<b>3 A</b>
		G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	<b>3 B</b>
		G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	<b>3 D</b>
		<b>Welded flange, 316L stainless steel, raised face</b>	
		1" ASME, 150 lb	<b>5 A</b>
		1" ASME, 300 lb	<b>5 B</b>
		1" ASME, 600 lb	<b>5 C</b>
		1½" ASME, 150 lb	<b>5 D</b>
		1½" ASME, 300 lb	<b>5 E</b>
		1½" ASME, 600 lb	<b>5 F</b>
		2" ASME, 150 lb	<b>5 G</b>
		2" ASME, 300 lb	<b>5 H</b>
		2" ASME, 600 lb	<b>5 J</b>
		3" ASME, 150 lb	<b>5 K</b>
		3" ASME, 300 lb	<b>5 L</b>
		3" ASME, 600 lb	<b>5 M</b>
		4" ASME, 150 lb	<b>5 N</b>
		4" ASME, 300 lb	<b>5 P</b>
		4" ASME, 600 lb	<b>5 Q</b>
		<b>Welded flange, 316L stainless steel, Type A flat faced</b>	
		DN 25, PN 16	<b>6 A</b>
		DN 25, PN 40	<b>6 B</b>
		DN 40, PN 16	<b>6 C</b>
		DN 40, PN 40	<b>6 D</b>
		DN 50, PN 16	<b>6 E</b>
		DN 50, PN 40	<b>6 F</b>
		DN 80, PN 16	<b>6 G</b>
		DN 80, PN 40	<b>6 H</b>
		DN 100, PN 16	<b>6 J</b>
		DN 100, PN 40	<b>6 K</b>
		(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)	
		<b>Probe length</b> (length from flange face) (threaded lengths include process thread)	
		<b>Note: No Y01 needed in order code for standard lengths</b>	
		Extended cable, 3000 mm (118.11"), length can be determined by customer on assembly	<b>A</b>
		Extended cable, 6000 mm (236.22"), length can be determined by customer on assembly	<b>B</b>
		Add order code Y01 and plain text: "Insertion length ... mm"	
		Extended cable, 500 ... 5000 mm (19.69 ... 196.85")	<b>C</b>
		Extended cable, 5001 ... 10000 mm (196.89 ... 393.70")	<b>D</b>
		Extended cable, 10001 ... 15000 mm (393.74 ... 590.55")	<b>E</b>
		Extended cable, 15001 ... 20000 mm (590.59 ... 787.4")	<b>F</b>
		Extended cable, 20001 ... 25000 mm (787.44 ... 984.25")	<b>G</b>
		Extended cable, 25001 ... 30000 mm (984.29 ... 1181.1")	<b>H</b>

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Digital

<b>Selection and Ordering data</b>		<b>Order No.</b>	<b>Order code</b>
<b>Pointek CLS200 - Digital - Cable with Threaded or Flanged process connection</b>	C)	7 ML 5 6 4 1 - 0	
Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces			
<b>Thermal Isolator</b>		0	
Without thermal isolator		0	
With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]		1	
<b>Remote mount electronics and mounting bracket</b>		2	
With 2 m (79") of cable		2	
With 5 m (197") of cable		3	
<b>Wetted Seals</b>		0	
FKM and PTFE		0	
FFKM and PTFE [for process temperatures above -20°C (-4°F)]		1	
<b>Probe Material</b>		0	
FEP jacketed cable with PPS probe body		0	
FEP jacketed cable with PVDF probe body		1	
<b>Approvals</b>		B	
Non-Sparking:			
CE, C-TICK, ATEX II 3 G Ex nA II T6...T4, ATEX II 2 D IP6X T100 °C			
Dust Ignition Proof:		C	
CE, C-TICK, ATEX II 1/2 D T100 °C			
Intrinsically Safe: <sup>1)</sup>		D	
CE, C-TICK, ATEX II 1 G EEx ia IIC T6...T4, ATEX II 1/2 D IP6X T100 °C			
Flameproof Enclosure with IS Probe:		E	
CE, C-TICK, ATEX II 1/2 G EEx d[iia] IIC T6...T4, ATEX II 1/2 D T100 °C			
Non-incendive:		F	
CSA/FM Class I, Div. 2, Gr. A, B, C, D			
CSA/FM Class II, Div. 2, Gr. F, G			
CSA/FM Class III T4 or T6			
Dust Ignition Proof with IS Probe:		G	
CSA/FM Class II, Div. 1, Gr. E, F, G			
CSA/FM Class III T4			
Intrinsically Safe: <sup>1)</sup>		H	
CSA/FM Class I, Div. 1, Gr. A, B, C, D			
CSA/FM Class II, Div. 1, Gr. E, F, G			
CSA/FM Class III T4			
Explosion Proof with IS Probe:		J	
CSA/FM Class I, Div. 1, Gr. A, B, C, D			
CSA/FM Class II, Div. 1, Gr. E, F, G			
CSA/FM Class III T4			
General Purpose (CSA, FM)		K	
General Purpose (CE, C-TICK)		L	
<b>Enclosure and Lid</b>		A	
Aluminum epoxy coated		B	
2 x 1/2" NPT via adapter - cable inlet, IP65		C	
2 x M20x1.5 cable inlet, IP65		D	
2 x 1/2" NPT via adapter - cable inlet, IP68			
2 x M20x1.5 cable inlet, IP68			

<sup>1)</sup> Barrier or Intrinsically safe power supply required for Intrinsically Safe protection

C) Subject to export regulations AL: N, ECCN: EAR99

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Digital

<b>Selection and Ordering data</b>		<b>Order No.</b>	<b>Selection and Ordering data</b>		<b>Order No.</b>
<b>Pointek CLS200 - Digital - Rod with Sanitary process connection</b>		C) 7ML5642 - 0	<b>Pointek CLS200 - Digital - Rod with Sanitary process connection</b>		C) 7ML5642 - 0
Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces			Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces		
<b>Process Connection</b>			Intrinsically Safe: <sup>1)</sup> CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4		H
Sanitary 316L stainless steel			Explosion Proof with IS Probe: CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4		J
1" sanitary fitting clamp	8 A		General Purpose (CSA, FM)		K
1½" sanitary fitting clamp	8 B		General Purpose (CE, C-TICK)		L
2" sanitary fitting clamp	8 C		<b>Enclosure and Lid</b>		
2½" sanitary fitting clamp	8 D		Aluminum epoxy coated		
3" sanitary fitting clamp	8 E		2 x ½" NPT via adapter - cable inlet, IP65 2 x M20x1.5 cable inlet, IP65 2 x ½" NPT via adapter - cable inlet, IP68 2 x M20x1.5 cable inlet, IP68	A B C D	
(Note: Sanitary connection dimensionally corresponds to the applicable ISO 2852 standard)					
<b>Probe length (length from process connection face)</b>					
Note: No Y01 needed in order code for standard lengths					
Compact 98 mm (3.86")	A				
Extended rod, 250 mm (9.84")	B				
Extended rod, 350 mm (13.78")	C				
Extended rod, 500 mm (19.69")	D				
Extended rod, 750 mm (29.53")	E				
Extended rod, 1000 mm (39.37")	F				
Extended rod, 1250 mm (49.21")	G				
Extended rod, 1350 mm (53.15")	H				
Extended rod, 1500 mm (59.06")	J				
Extended rod, 1750 mm (68.90")	K				
Extended rod, 2000 mm (78.74")	L				
Add order code Y01 and plain text: "Insertion length ... mm"	M				
Extended rod, 110 ... 350 mm (4.3 ... 13.78")	N				
Extended rod, 351 ... 1000 mm (13.82 ... 39.33")	P				
Extended rod, 1001 ... 2000 mm (39.41 ... 78.74")	Q				
Extended rod, 2001 ... 3000 mm (78.78 ... 118.11")	R				
Extended rod, 3001 ... 4000 mm (118.15 ... 157.48")	S				
Extended rod, 4001 ... 5000 mm (157.52 ... 196.85")	T				
Extended rod, 5001 ... 5500 mm (196.89 ... 216.53")	0				
<b>Thermal isolator</b>	1				
Without thermal isolator					
With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]					
<b>Remote mount electronics and mounting bracket</b>	2				
With 2 m (79") of cable	3				
With 5 m (197") of cable	0				
<b>Wetted Seals</b>	1				
FKM					
FFKM [for process temperatures above -20°C (-4°F)]					
<b>Probe Material</b>	0				
316L Stainless Steel with PPS probe body	1				
316L Stainless Steel with PVDF probe body					
<b>Approvals</b>	B				
Non-Sparking:	C				
CE, C-TICK, ATEX II 3 G Ex nA II T6...T4,	D				
ATEX II 2 D IP6X T100 °C	E				
Dust Ignition Proof:	F				
CE, C-TICK, ATEX II 1/2 D T100 °C	G				
Intrinsically Safe: <sup>1)</sup>					
CE, C-TICK, ATEX II 1 G EEx ia IIC T6...T4,					
ATEX II 1/2 D IP6X T100 °C					
Flameproof Enclosure with IS Probe:					
CE, C-TICK, ATEX II 1/2 G EEx d[ia] IIC T6...T4,					
ATEX II 1/2 D T100 °C					
Non-incendive:					
CSA/FM Class I, Div. 2, Gr. A, B, C, D					
CSA/FM Class II, Div. 2, Gr. F, G					
CSA/FM Class III T4 or T6					
Dust Ignition Proof with IS Probe:					
CSA/FM Class II, Div. 1, Gr. E, F, G					
CSA/FM Class III T4					

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Digital

<b>Selection and Ordering data</b>		Order No.	Order No.
<b>Pointek CLS200 - Digital - Rod with Sliding coupling with Threaded process connection</b>		C) 7 M L 5 6 4 3 -	C) 7 M L 5 6 4 3 -
Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces		0	0
<b>Process Connection</b>			
Threaded, 316L stainless steel			
¾" NPT [(Taper), ANSI/ASME B1.20.1]	0 A		G
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B		H
1¼" NPT [(Taper), ANSI/ASME B1.20.1]	0 C		
1½" NPT [(Taper), ANSI/ASME B1.20.1]	0 D		J
R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A		
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B		K
R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D		L
G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A		
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B		
G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D		
<b>Probe length</b> (length from flange face) (threaded lengths include process thread)			
Note: No Y01 needed in order code for standard lengths			
Extended rod, 350 mm (13.78")	C		A
Extended rod, 500 mm (19.69")	D		B
Extended rod, 750 mm (29.53")	E		C
Extended rod, 1000 mm (39.37")	F		D
Extended rod, 1250 mm (49.21")	G		
Extended rod, 1350 mm (53.15")	H		
Extended rod, 1500 mm (59.06")	J		
Extended rod, 1750 mm (68.90")	K		
Extended rod, 2000 mm (78.74")	L		
Add order code Y01 and plain text: "Insertion length ... mm"			
Extended rod, 350 ... 1000 mm (13.82 ... 39.33")	M		
Extended rod, 1001 ... 2000 mm (39.41 ... 78.74")	N		
Extended rod, 2001 ... 3000 mm (78.78 ... 118.11")	P		
Extended rod, 3001 ... 4000 mm (118.15 ... 157.48")	Q		
Extended rod, 4001 ... 5000 mm (157.52 ... 196.85")	R		
Extended rod, 5001 ... 5500 mm (196.89 ... 216.53")	S		
<b>Thermal Isolator</b>			
Without thermal isolator	0		
With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]	1		
<b>Remote mount electronics and mounting bracket</b>			
With 2 m (79") of cable	2		
With 5 m (197") of cable	3		
<b>Wetted Seals</b>			
FKM and PTFE	0		
FFKM and PTFE [for process temperatures above -20°C (-4°F)]	1		
<b>Probe Material</b>			
316L Stainless Steel with PPS probe body	0		
316L Stainless Steel with PVDF probe body	1		
<b>Approvals</b>			
Non-Sparking:			
CE, C-TICK, ATEX II 3 G Ex nA II T6...T4,			
ATEX II 2 D IP6X T100 °C			
Dust Ignition Proof:			
CE, C-TICK, ATEX II 1/2 D T100 °C			
Intrinsically Safe: <sup>1)</sup>			
CE, C-TICK, ATEX II 1 G EEx ia IIC T6...T4,			
ATEX II 1/2 D IP6X T100 °C			
Flameproof Enclosure with IS Probe:			
CE, C-TICK, ATEX II 1/2 G EEx d[ia] IIC T6...T4,			
ATEX II 1/2 D T100 °C			
Non-incendive:			
CSA/FM Class I, Div. 2, Gr. A, B, C, D			
CSA/FM Class II, Div. 2, Gr. F, G			
CSA/FM Class III T4 or T6			

# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Digital

Selection and Ordering data		Order No.	Selection and Ordering data	Order No.
<b>Pointek CLS200 - Digital - PFA Rod with PFA Flanged process connection</b>		C) 7 M L 5 6 4 4 - 0	<b>Pointek CLS200 - Digital - PFA Rod with PFA Flanged process connection</b>	C) 7 M L 5 6 4 4 - 0
Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces			Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces	
<b>Process Connection</b>			<b>Wetted Seals</b>	
Welded flange, PFA coated, 316L stainless steel, raised face			FFKM [for process temperatures above -20°C (-4°F)]	0 1
1" ASME, 150 lb	5 A		<b>Probe Material</b>	
1" ASME, 300 lb	5 B		PFA Coated 316L Stainless Steel with PPS probe body	0 1
1" ASME, 600 lb	5 C		PFA Coated 316L Stainless Steel with PVDF probe body	
1½" ASME, 150 lb	5 D			
1½" ASME, 300 lb	5 E			
1½" ASME, 600 lb	5 F			
2" ASME, 150 lb	5 G		<b>Approvals</b>	
2" ASME, 300 lb	5 H		Non-incendive:	F
2" ASME, 600 lb	5 J		CSA/FM Class I, Div. 2, Gr. A, B, C, D	
3" ASME, 150 lb	5 K		CSA/FM Class II, Div. 2, Gr. F, G	
3" ASME, 300 lb	5 L		CSA/FM Class III T4 or T6	
3" ASME, 600 lb	5 M		Dust Ignition Proof with IS Probe:	G
4" ASME, 150 lb	5 N		CSA/FM Class I, Div. 1, Gr. E, F, G	
4" ASME, 300 lb	5 P		CSA/FM Class III T4	
4" ASME, 600 lb	5 Q		Intrinsically Safe: <sup>1)</sup>	H
Welded flange, PFA coated, 316L stainless steel, Type A flat faced			CSA/FM Class I, Div. 1, Gr. A, B, C, D	
DN 25, PN 16	6 A		CSA/FM Class II, Div. 1, Gr. E, F, G	
DN 25, PN 40	6 B		CSA/FM Class III T4	
DN 40, PN 16	6 C		Explosion Proof with IS Probe:	J
DN 40, PN 40	6 D		CSA/FM Class I, Div. 1, Gr. A, B, C, D	
DN 50, PN 16	6 E		CSA/FM Class II, Div. 1, Gr. E, F, G	
DN 50, PN 40	6 F		CSA/FM Class III T4	
DN 80, PN 16	6 G		General Purpose (CSA, FM)	K
DN 80, PN 40	6 H			
DN 100, PN 16	6 J		<b>Enclosure and Lid</b>	
DN 100, PN 40	6 K		Aluminum epoxy coated	
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)			2 x ½" NPT via adapter - cable inlet, IP65	A
<b>Probe length (length from process connection face)</b>			2 x M20x1.5 cable inlet, IP65	B
Note: No Y01 needed in order code for standard lengths			2 x ½" NPT via adapter - cable inlet, IP68	C
Compact (Threaded 98 mm (3.86"))	A		2 x M20x1.5 cable inlet, IP68	D
Extended rod, 250 mm (9.84")	B			
Extended rod, 350 mm (13.78")	C		1) Barrier or Intrinsically safe power supply required for Intrinsically Safe protection	
Extended rod, 500 mm (19.69")	D			
Extended rod, 750 mm (29.53")	E		C) Subject to export regulations AL: N, ECCN: EAR99	
Extended rod, 1000 mm (39.37")	F			
Extended rod, 1250 mm (49.21")	G			
Extended rod, 1350 mm (53.15")	H			
Extended rod, 1500 mm (59.06")	J			
Extended rod, 1750 mm (68.90")	K			
Extended rod, 2000 mm (78.74")	L			
Add order code Y01 and plain text:	M			
"Insertion length ... mm"	N			
Extended rod, 200 ... 1000 mm (7.87 ... 39.33")	P			
Extended rod, 1001 ... 2000 mm (39.41 ... 78.74")	Q			
Extended rod, 2001 ... 3000 mm (78.78 ... 118.11")	R			
Extended rod, 3001 ... 4000 mm (118.15 ... 157.48")	S			
Extended rod, 4001 ... 5000 mm (157.52 ... 196.85")	0			
Extended rod, 5001 ... 5500 mm (196.89 ... 216.53")	1			
<b>Thermal isolator</b>	2			
Without thermal isolator	3			
With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]				
<b>Remote mount electronics and mounting bracket</b>				
With 2 m (79") of cable				
With 5 m (197") of cable				

# Level Measurement

## Point level measurement - Capacitance switches

Pointek CLS200 - Standard and Digital

Selection and Ordering data	Order code
<b><i>Operating Instructions - Standard</i></b>	
English	C) <b>7ML1998-5JH02</b>
German	C) <b>7ML1998-5JH32</b>
Note: The Operating Instructions should be ordered as a separate line on the order.	
Quick Start manual, multi-language	C) <b>7ML1998-5QY82</b>
This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	
<b><i>Operating Instructions - Digital</i></b>	
English	C) <b>7ML1998-5JJ02</b>
German	C) <b>7ML1998-5JJ32</b>
Note: The Operating Instructions should be ordered as a separate line on the order.	
Quick Start manual, multi-language	C) <b>7ML1998-5XA82</b>
This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	
<b><i>Accessories</i></b>	
Sensguard, 3/4" NPT (PPS) Only available for CLS200 with 3/4" NPT thread	<b>7ML1830-1DL</b>
Sensguard, R 1" (BSPT) (PPS) Only available for CLS200 with 3/4" NPT thread	<b>7ML1830-1DM</b>
One metallic cable gland M20x1.5, -40 ... +80 °C (-40 ... +176 °F) with integrated shield connection (available for PROFIBUS PA)	<b>7ML1930-1AQ</b>
<b><i>General Purpose</i></b>	
1/2" NPT General Purpose Cable Entry IP68/IP69K C) NEMA6, -40 ... -100 °C (-40 ... -212 °F), cable size 6 ... 12 mm (0.236 ... 0.472")	<b>A5E03252530</b>
M20x1.5 General Purpose Cable Entry IP68/IP69K C) NEMA6, -40 ... -100 °C (-40 ... -212 °F), cable size 7 ... 12 mm (0.275 ... 0.472")	<b>A5E03252531</b>
<b><i>Hazardous Locations</i></b>	
1/2" NPT EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD Exd A21 (Zone 1, Zone 2, Zone 21, Zone 22, and in Gas Groups IIA, IIB and IIC) -60 ... +80 °C IP66, IP67, IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472")	<b>A5E03252527</b>
M20 EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD Exd A21 (Zone 1, Zone 2, Zone 21, Zone 22 and in Gas Groups IIA, IIB and IIC) -60 ... +80 °C IP66, IP67, IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472")	<b>A5E03252528</b>
<b>Blind threaded flanges are available. Please contact <a href="mailto:nacc.smpi@siemens.com">nacc.smpi@siemens.com</a> with a completed application data sheet on page 5/9</b>	
<b>Pointek Specials</b>	<b>See page 5/77</b>

C) Subject to export regulations AL: N, ECCN: EAR99


# Level Measurement

## Point level measurement - Capacitance switches

### Pointek CLS200 - Standard and Digital

#### Characteristic curves


**Pressure/Temperature Curve**  
**CLS200 Sliding Coupling**  
**Threaded Process Connections**  
 (7ML5633 and 7ML5643)

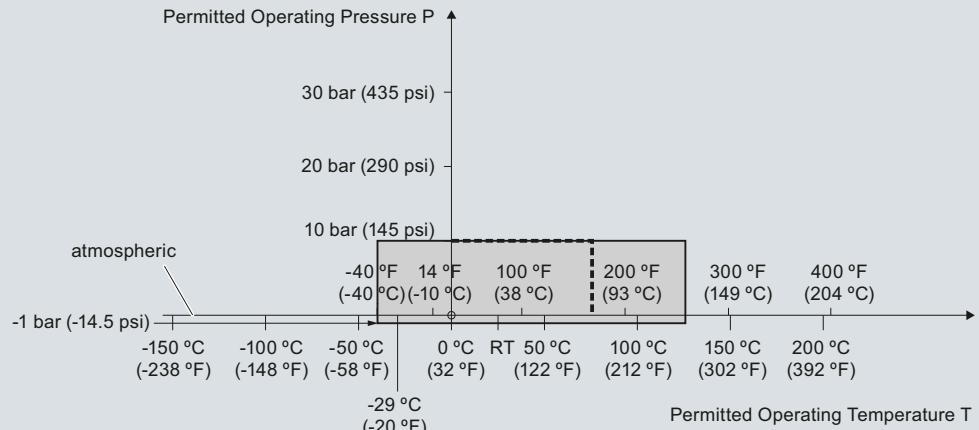

----- Example:  
 Permitted operating pressure = 10 bar (145 psi) at 75 °C

Pointek CLS200 Process Pressure/Temperature derating curves (7ML5633 and 7ML5643)

**Pressure/Temperature Curve**  
**CLS200 Cable**  
**Threaded Process Connections**  
 (7ML5631 and 7ML5641)

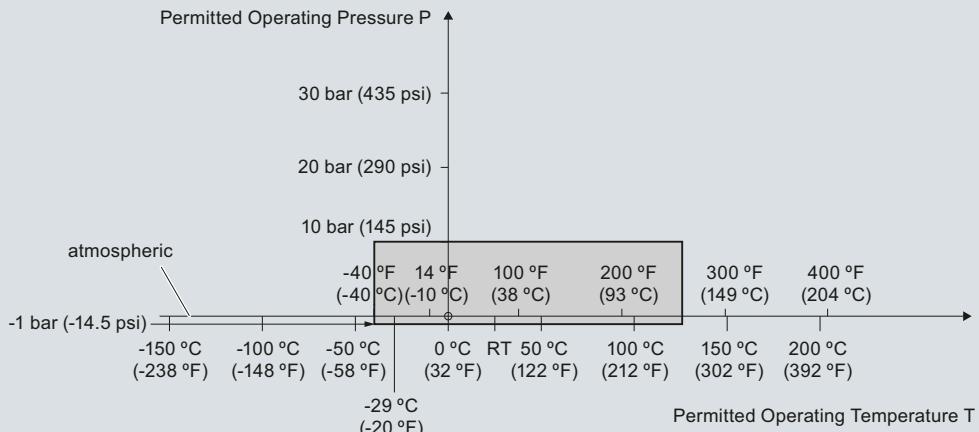


Pointek CLS200 Process Pressure/Temperature derating curves (7ML5631 and 7ML5641)

# Level Measurement

## Point level measurement - Capacitance switches


Pointek CLS200 - Standard and Digital

**Pressure/Temperature Curve**  
**CLS200 Compact and Extended Rod**  
**Threaded Process Connections**  
**(7ML5630 and 7ML5640)**

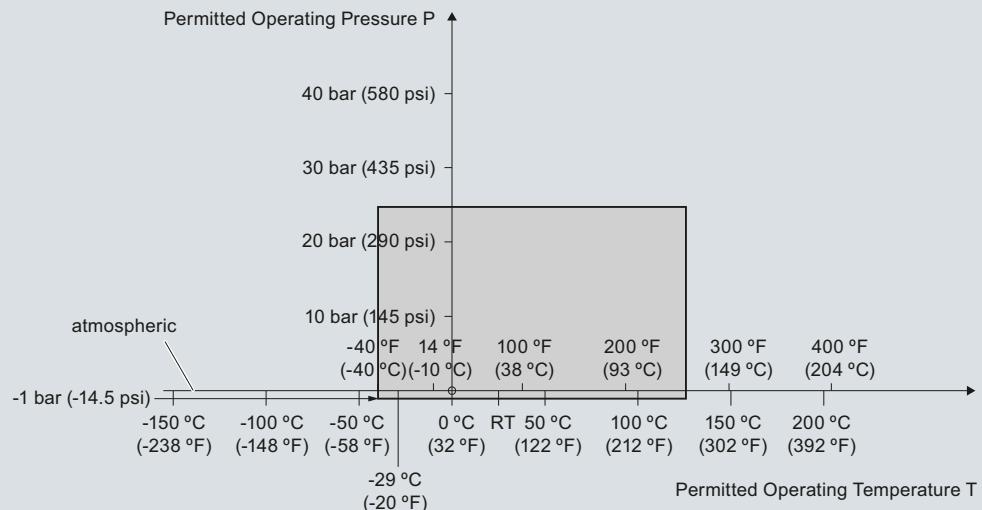

Pointek CLS200 Process Pressure/Temperature derating curves (7ML5630 or 7ML5640)

**Pressure/Temperature Curve**  
**CLS200 Compact and Extended Sanitary Type**  
**Sanitary Process Connections**  
**(7ML5632 and 7ML5642)**

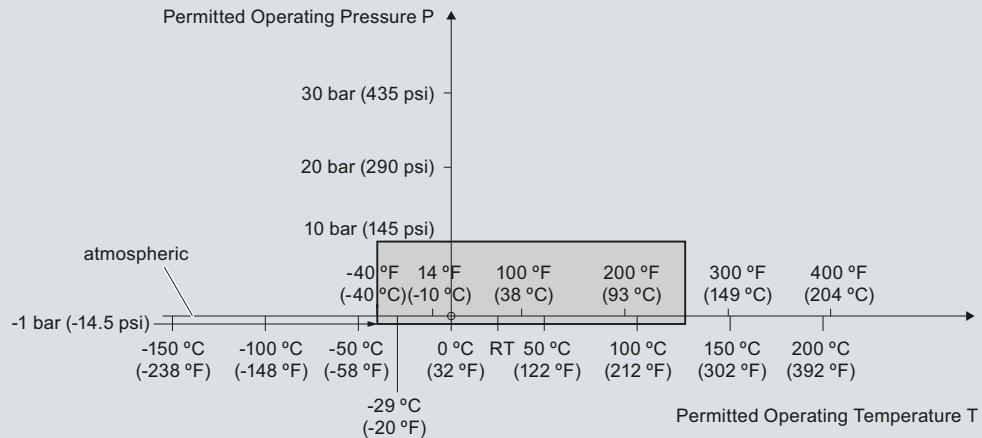

Pointek CLS200 Process Pressure/Temperature derating curves (7ML5632 and 7ML5642)

# Level Measurement


## Point level measurement - Capacitance switches

### Pointek CLS200 - Standard and Digital

#### Pressure/Temperature Curve

**CLS200 Cable**

**ASME Flanged Process Connections**  
(7ML5631 and 7ML5641)

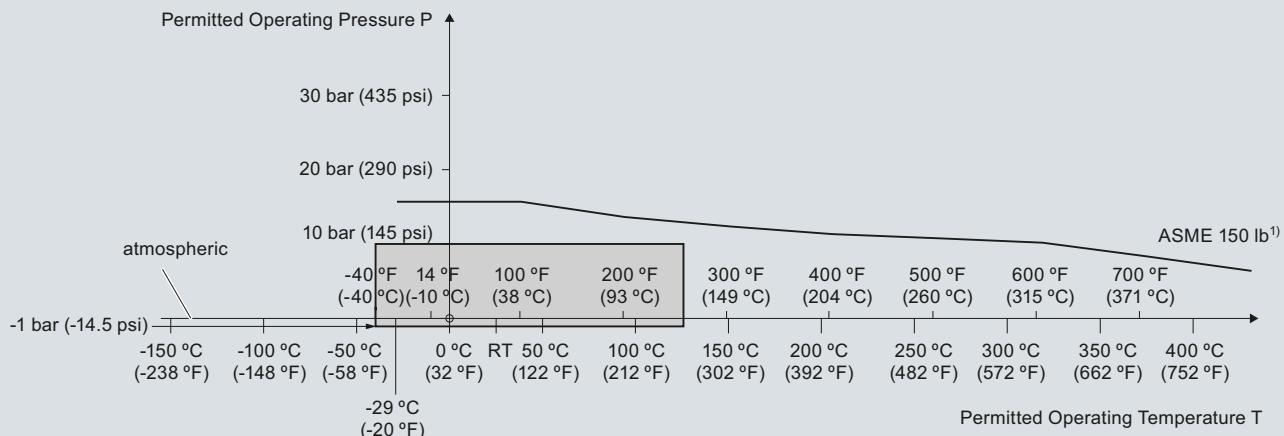


<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 Process Pressure/Temperature derating curves (7ML5631 and 7ML5641)

#### Pressure/Temperature Curve

**CLS200 Compact and Extended Rod**  
**ASME Flanged Process Connections**  
(7ML5630 and 7ML5640)

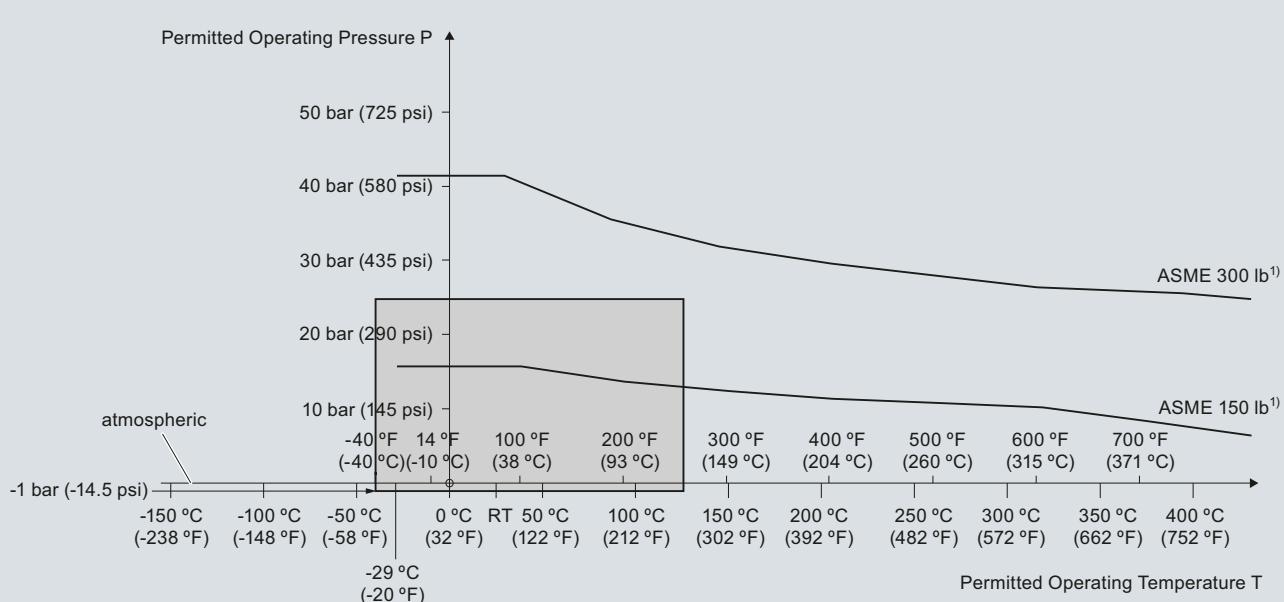

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 Process Pressure/Temperature derating curves (7ML5630 and 7ML5640)

# Level Measurement


## Point level measurement - Capacitance switches

Pointek CLS200 - Standard and Digital

### Pressure/Temperature Curve

**CLS200 Cable**

**EN Flanged Process Connections**  
(7ML5631 and 7ML5641)

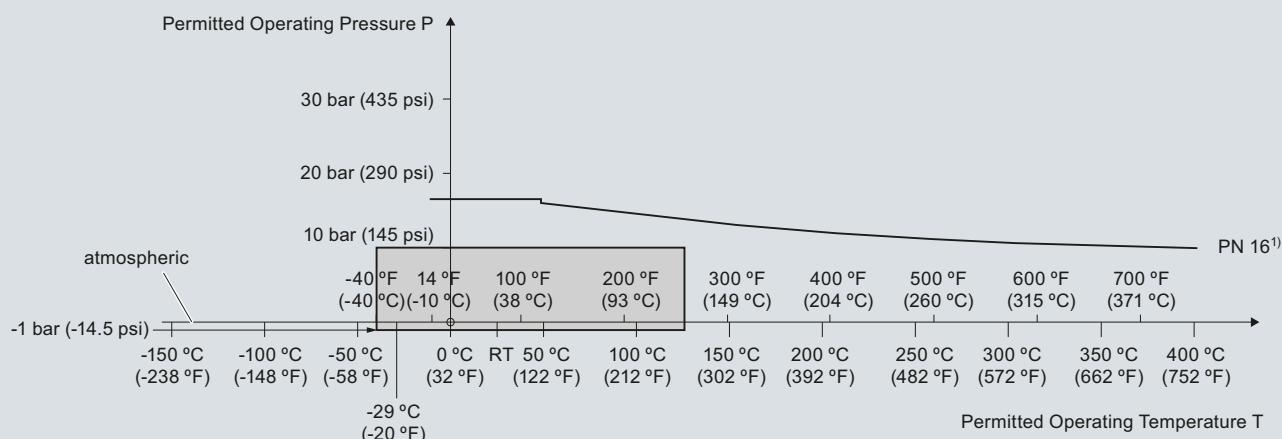


<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 Process Pressure/Temperature derating curves (7ML5631 and 7ML5641)

### Pressure/Temperature Curve

**CLS200 Compact and Extended Rod**

**EN Flanged Process Connections**  
(7ML5630 and 7ML5640)

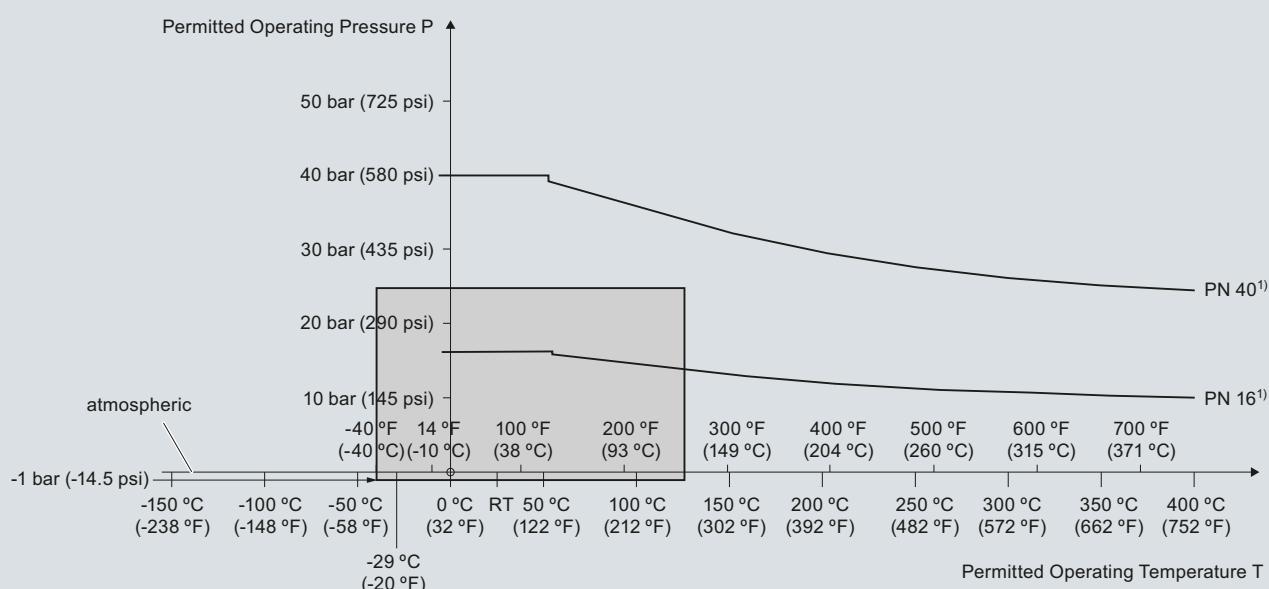

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 Process Pressure/Temperature derating curves (7ML5630 and 7ML5640)


# Level Measurement

## Point level measurement - Capacitance switches


### Pointek CLS200 - Standard and Digital

#### Dimensional drawings


**Compact version**  
**Threaded**  
(7ML5630 and 7ML5640)

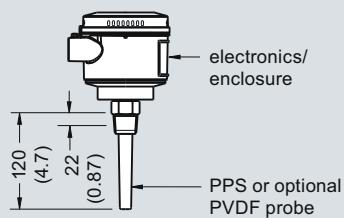

**Sanitary compact version**  
**Sanitary fitting**  
(7ML5632 and 7ML5642)

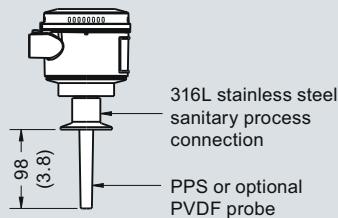


**Extended rod version**  
**Threaded**  
(7ML5630 and 7ML5640)

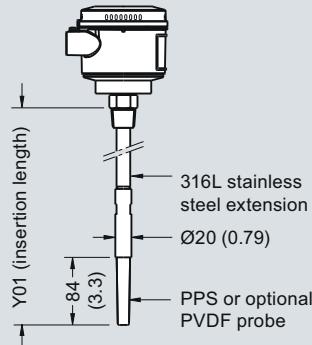


Min. insertion length = 200 (7.87)  
Max. insertion length = 5500 (216)


**Extended cable version**  
**Threaded**  
(7ML5631 and 7ML5641)

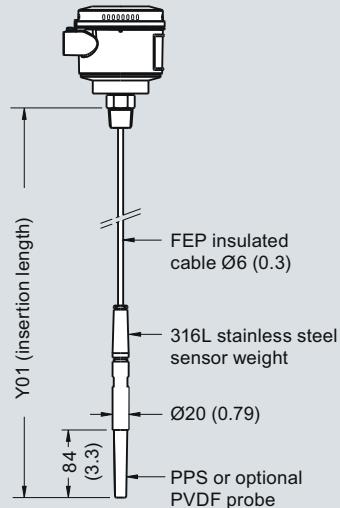

Min. insertion length = 500 (19.69)  
Max. insertion length = 30000 (1181)  
Applicable for liquids and solids applications. Cable can be shortened on site.

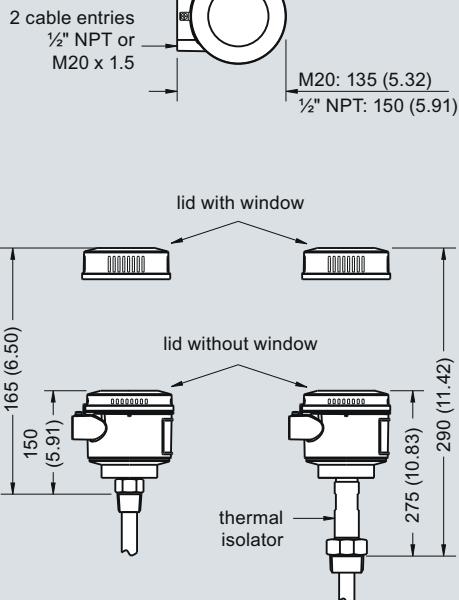


**Sanitary extended version**  
**Sanitary fitting**  
(7ML5632 and 7ML5642)

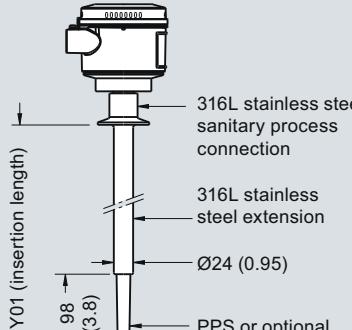

Min. insertion length = 110 (4.3)  
Max. insertion length = 5500 (216)

**Sliding coupling version**  
**Threaded**  
(7ML5633 and 7ML5643)

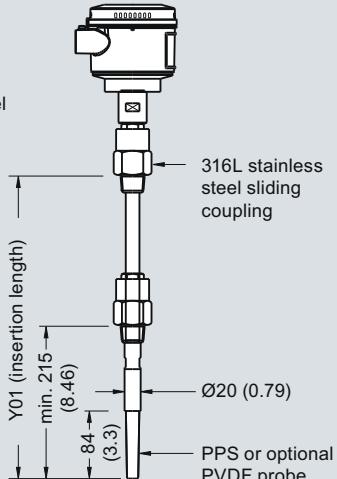

Min. insertion length = 350 (13.82)  
Max. insertion length = 5500 (216)

Pointek CLS200 - Threaded/Sanitary Process Connections, dimensions in mm (inch)



# Level Measurement

## Point level measurement - Capacitance switches

Pointek CLS200 - Standard and Digital


### Compact version

Welded Flange (7ML5630 and 7ML5640)  
Welded Flange, PFA coated  
(7ML5634 and 7ML5644)

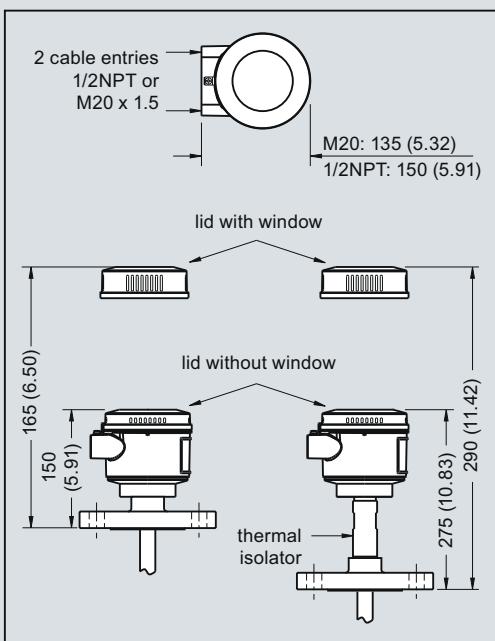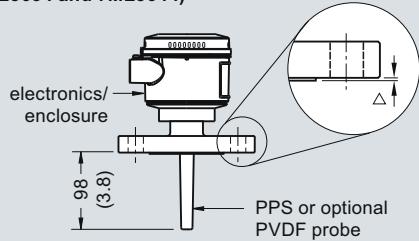


### Extended rod version

Welded Flange (7ML5630 and 7ML5640)  
Welded Flange, PFA coated  
(7ML5634 and 7ML5644)

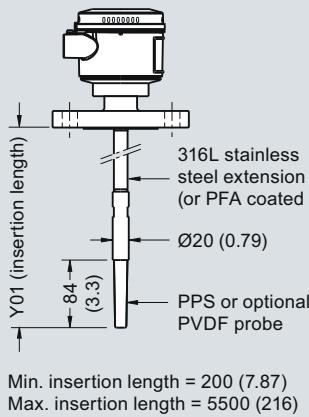

### Extended cable version

Welded Flange  
(7ML5631 and 7ML5641)

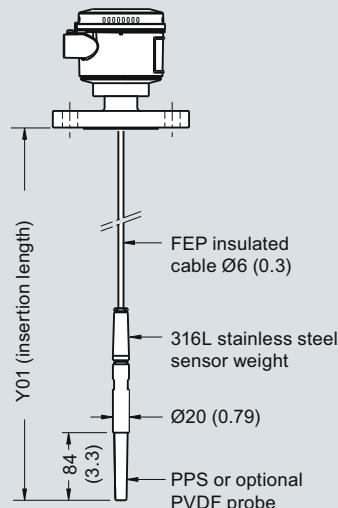

Min. insertion length = 500 (19.69)  
Max. insertion length = 30000 (1181)  
Applicable for liquids and solids applications. Cable can be shortened on site.

Flange Facing (raised face)	
Flange Class	Facing thickness
△ ASME 150/300	2 (0.08)
△ ASME 600/900	7 (0.28)
△ PN16/40	2 (0.08)

Insertion length does not include any raised face/gasket face dimension  
(see Flange Facing Table above)


Pointek CLS200 - Flanged Process Connections, dimensions in mm (inch)

# Level Measurement


## Point level measurement - Capacitance switches

### Pointek CLS200 - Standard and Digital

#### Schematics

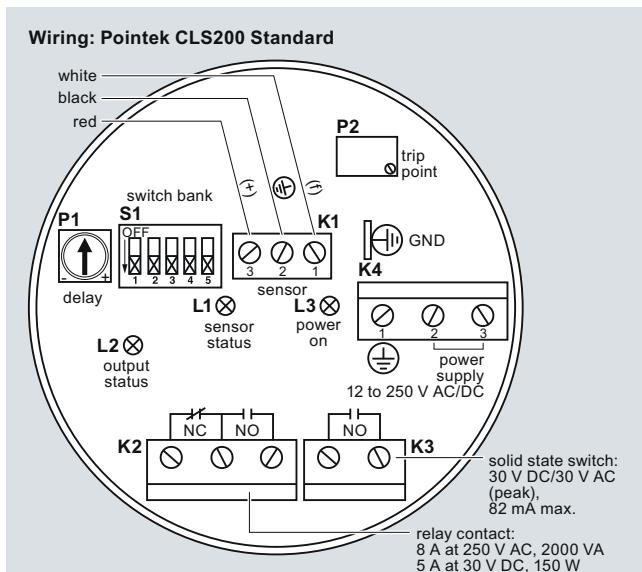
**Notes:**

- Identification label is on underside of lid. Switch and Potentiometer settings are for illustration purposes only (Refer to Operation/Setup in manual).
- All field wiring must have insulation suitable for at least 250 V.
- Relay contact terminals are for use with equipment having no accessible live parts and wiring having insulation suitable for at least 250 V.
- Maximum working voltage between adjacent relay contacts shall be 250 V.
- Refer to the Instruction Manual or contact Siemens representative for detailed wiring information.

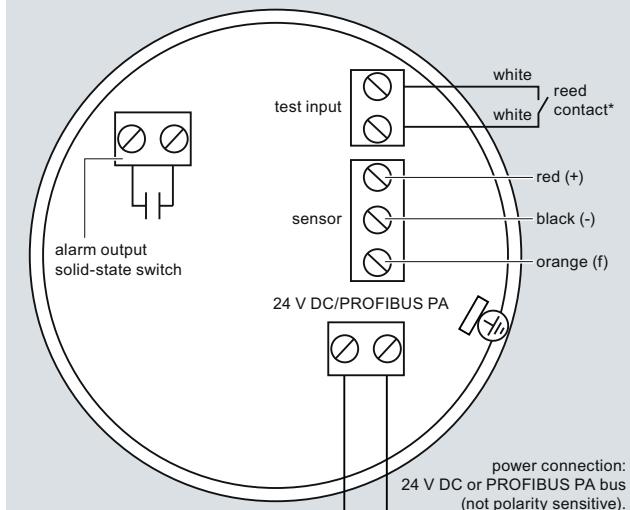**Wiring: Pointek CLS200 Digital**

**Notes:**

Refer to the Instruction Manual or contact a Siemens representative for detailed wiring information.

**\*Magnet Activated Sensor Test**

A magnet can be used to test the sensor without opening the lid of the Pointek CLS200 Digital version. Bring the magnet close to the test area indicated on the enclosure. The sensor test starts and finishes automatically after 10 seconds.



Pointek CLS200 connections

# FINE CONTROLS (UK) LTD



Fine Controls have been supplying process controls & instrumentation equipment since 1994, & now serves an ever expanding customer base, both in the UK & globally.

We offer a full range of valve & instrumentation products & services, with our product range representing leading technologies & brands:

**Flow:** Flow Meters & Transmitters, Flow Switches, Flow Control Valves & Batch Control Systems

**Temperature:** Temperature Probes & Thermowells, Temperature Transmitters, Temperature Regulators & Temperature Displays

**Level:** Level Transmitters & Switches

**Pressure:** Pressure Gauges & Transmitters, Precision & High Pressure Regulators & I-P Converters, Volume boosters.

**Precision Pneumatics:** Pressure Regulators, I-P Converters, Volume Boosters, Vacuum Regulators

**Valves:** Solenoid & Pneumatic Valves, Control Valves & Positioners, Actuated Ball, Globe or Diaphragm Valves & Isolation Valves

**Services:** Repair, Calibration, Panel Build, System Design & Commissioning

 FAIRCHILD  
A rotork® Brand











  
Solenoid Valves  
A rotork® Brand



  
A rotork® Brand







  
Baumer Group



  
CONTROLS  
A rotork® Brand

