

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Standard

Overview



Pointek CLS300 (standard version) is an inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.

Benefits

- Patented Active-Shield technology so measurement is unaffected by material buildup or nozzle interference in active shield section
- Performs in extremely abrasive conditions because of solid rod construction
- Three LED indicators for adjustment control, output status and power
- High-temperature version up to +400 °C (+185 °F)

Application

Pointek CLS300 standard version has three LED indicators with basic relay and solid-state switch alarms. The robust design of CLS300 makes it specifically applicable for heavy solids applications where abrasive materials occur as in the mining industry.


The fully potted electronics are unaffected by condensation, dust or vibration.

Wetted parts are made of stainless steel with a PFA shield for high chemical resistance, and of ceramic and stainless steel for high temperature version. Materials with low or high dielectric constants can be accurately detected. The unique Active Shield suppresses interference from material buildup or long installation nozzles.

The unique modular design of the Pointek CLS300 provides a wide range of configurations, process connections, extensions and approvals to meet the temperature and pressure requirements of specific applications. The modular design makes ordering easier and reduces stocking requirements. A wide range of probe configurations are available, including rod and cable versions.

- Key Applications: liquids, slurries, bulk solids, relatively high pressure and temperature, hazardous areas, milling and mining applications

Configuration

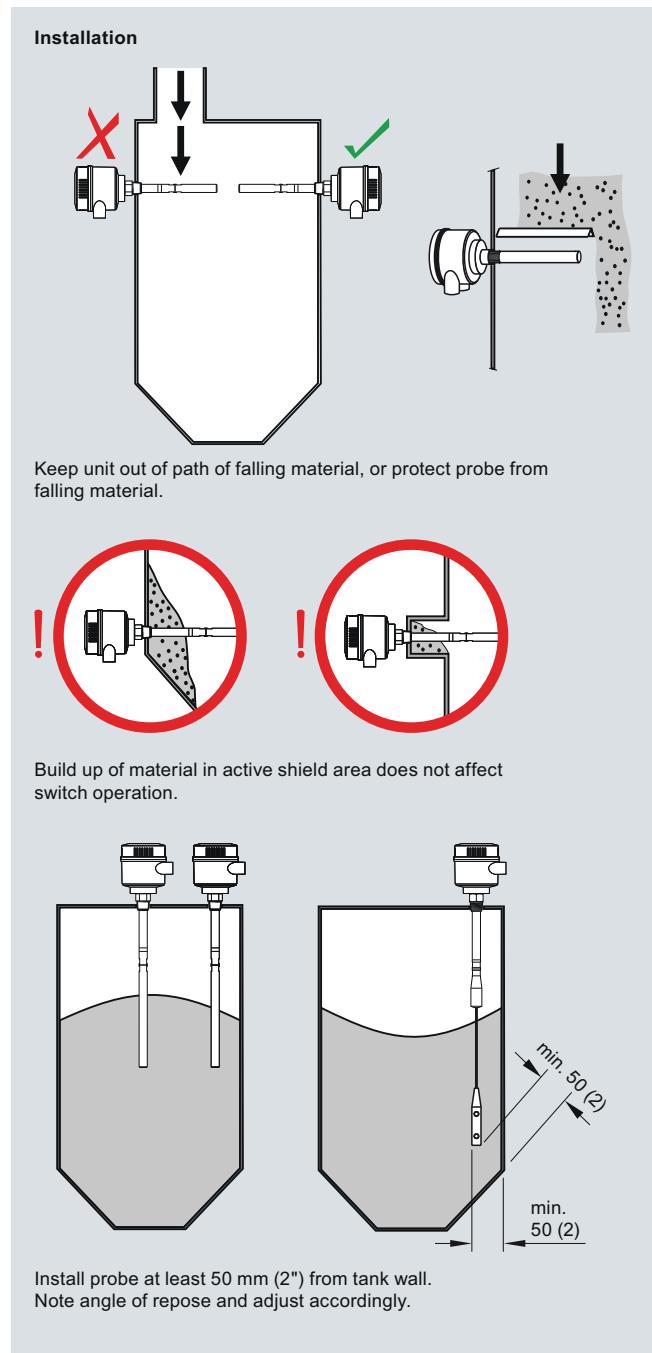

Pointek CLS300 installation, dimensions in mm (inch)

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Standard

Technical specifications

Mode of operation		Design
Measuring principle	Inverse frequency shift capacitive level detection	Powder-coated aluminum with gasket
Input		Degree of Protection
Measured variable	Change in picoFarad (pF)	Standard: Type 4/NEMA 4/IP65 Optional: Type 4/NEMA 4/IP68
Output		Cable inlet
Output signal		2 x M20x1.5 thread (option: 2 x ½" NPT conduit entry including 1 plugged entry)
• Relay output	1 SPDT Form C relay	Controls and displays
- Max. contact voltage	• 30 V DC	Displays
- Max. contact current	• 250 V AC	3 LEDs, for probe status, output status and power supply
- Max. switching capacity	• 5 A (DC)	Potentiometers
- Time delay (ON and/or OFF)	• 8 A (AC)	2 potentiometers for time delay and sensitivity
• Solid-state output	• 150 W (DC)	Switches
- Output	• 2000 VA (AC)	5 DIP switches for delay on/off, fail-safe high/low, time delay test/adjust, high/low sensitivity, test delay settings
- Protection	1 ... 60 s	Power supply
- Max. switching voltage	Galvanically isolated	Supply
- Max. load current	Against reversed polarity (bipolar)	12 ... 250 V AC/DC, 0 ... 60 Hz, galvanically isolated, 2 W
- Voltage drop	• 30 V (DC)	Certificates and approvals
- Time delay (pre or post switching)	• 30 V peak (AC)	General Purpose
	82 mA	ATEX II 1/2 G EEx d[ia] IIC T6...T1 ATEX II 1/2 D T100 °C
	< 1 V, typical at 50 mA	Dust Ignition Proof with IS Probe
	1 ... 60 s	ATEX II 1/2 D T100 °C CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
Accuracy		Explosion Proof Enclosure with IS Probe
Resolution	1 % change in actual capacitance	CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
• Min. sensitivity (pF)	0.2 % of actual capacitance value	Marine
• Max. temperature error		Lloyds Register of Shipping, Categories ENV1, ENV2 and ENV5
Rated operating conditions¹⁾		Overflow Protection
Installation conditions	Indoor/outdoor	WHG (Germany) VLAREM II (Belgium)
• Location		Others
Ambient conditions		Pattern Approval (China)
• Ambient temperature	-40 ... +85 °C (-40 ... +185 °F) ²⁾	
Medium conditions	Liquids, bulk solids, slurries and interfaces, and applications with viscous materials	
• Relative dielectric constant ϵ_r	Min. 1.5	
• Process temperature		
- Rod/Cable version	-40 ... +200 °C (-40 ... +392 °F) ²⁾	
- High-temperature version	-40 ... +400 °C (-40 ... +752 °F)	
• Process pressure ³⁾	-1 ... +35 bar g (-14.6 ... +511 psi g)	

Design: Probe	Rod version	High Temperature version	Cable version
Length	Min. 250 mm (9.8"), max. 1000 mm (40")	Min. 250 mm (9.8"), max. 1000 mm (40")	Min. 1000 mm (40"), max. 25000 mm (984")
Sensor wetted parts	PFA (no insulation on active probe), 316L stainless steel, PEEK isolators	Ceramic (ZrO_2) ¹⁾ isolators (no insulation on active probe), 316L stainless steel	316 stainless steel, optional PFA, PEEK isolators
O-ring seal material	FKM (optional FFKM) ²⁾	Graphite ²⁾	FKM (optional FFKM) ²⁾
Thermal isolator	Optional	Standard	Optional
Extension	User selectable length	User selectable length	User selectable cable length

¹⁾ Zirconium Oxide

²⁾ For Caustic Materials please contact nacc.smp@siemens.com for alternative O-rings

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Standard

Selection and Ordering data		Order No.	Selection and Ordering data	Order No.
Pointek CLS300 - Standard - Rod Version with Threaded or Flanged process connection		C) 7 M L 5 6 5 0 -	Pointek CLS300 - Standard - Rod Version with Threaded or Flanged process connection	C) 7 M L 5 6 5 0 -
Inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.		- 0	Inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.	- 0
Process Connection			Add order code Y01 and plain text: "Insertion length ... mm"	
Threaded, 316L stainless steel			Extended rod, factory adjusted length 250 ... 499 mm (9.8 ... 19.65")	E
3/4" NPT [(Taper), ANSI/ASME B1.20.1]	0 A		Extended rod, factory adjusted length 500 ... 749 mm (19.69 ... 29.49")	F
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B		Extended rod, factory adjusted length 750 ... 999 mm (29.53 ... 39.3")	G
1 1/4" NPT [(Taper), ANSI/ASME B1.20.1]	0 C			
1 1/2" NPT [(Taper), ANSI/ASME B1.20.1]	0 D			
R 3/4" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A			
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B			
R 1 1/2" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D			
G 3/4" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A			
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B			
G 1 1/2" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D			
Welded flange, 316L stainless steel, raised face				
1" ASME, 150 lb	5 A			
1" ASME, 300 lb	5 B			
1" ASME, 600 lb	5 C			
1 1/2" ASME, 150 lb	5 D			
1 1/2" ASME, 300 lb	5 E			
1 1/2" ASME, 600 lb	5 F			
2" ASME, 150 lb	5 G			
2" ASME, 300 lb	5 H			
2" ASME, 600 lb	5 J			
3" ASME, 150 lb	5 K			
3" ASME, 300 lb	5 L			
3" ASME, 600 lb	5 M			
4" ASME, 150 lb	5 N			
4" ASME, 300 lb	5 P			
4" ASME, 600 lb	5 Q			
Welded flange, 316L stainless steel, Type A flat faced				
DN 25, PN 16	6 A			
DN 25, PN 40	6 B			
DN 40, PN 16	6 C			
DN 40, PN 40	6 D			
DN 50, PN 16	6 E			
DN 50, PN 40	6 F			
DN 80, PN 16	6 G			
DN 80, PN 40	6 H			
DN 100, PN 16	6 J			
DN 100, PN 40	6 K			
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)				
Probe length (length from flange face) (threaded lengths include process thread)	A			
Note: No Y01 needed in order code for standard lengths	B			
Standard version, rod 350 mm (13.78")	C			
Extended rod, length 500 mm (19.69")	D			
Extended rod, length 750 mm (29.53")				
Extended rod, length 1000 mm (39.37")				

¹⁾ Available with Probe version options B to D, F, G only [≥ 500 mm (19.69")]
²⁾ Available with Probe version options C, D, and, G only [≥ 750 mm (29.53")]

C) Subject to export regulations AL: N, ECCN: EAR99

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Standard

Selection and Ordering data	Order code	Selection and Ordering data	Order No.
Further designs		Pointek CLS300 - Standard - Cable Version with C) Threaded or Flanged process connection	7 M L 5 6 5 1 -
Please add "-Z" to Order No. and specify Order code(s).		Inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.	
Total insertion length: enter the total insertion length in plain text description	Y01	Process Connection	
Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15	<u>Threaded, 316L stainless steel</u>	
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11	1 1/4" NPT [(Taper), ANSI/ASME B1.20.1]	0 C
Inspection Certificate Type 3.1 per EN 10204	C12	1 1/2" NPT [(Taper), ANSI/ASME B1.20.1]	0 D
Operating Instructions	See page 5/54	R 1 1/2" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D
Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.		G 1 1/2" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D
Accessories	See page 5/54	<u>Welded flange, 316L stainless steel, raised face</u>	
		1 1/2" ASME, 150 lb	5 D
		1 1/2" ASME, 300 lb	5 E
		1 1/2" ASME, 600 lb	5 F
		2" ASME, 150 lb	5 G
		2" ASME, 300 lb	5 H
		2" ASME, 600 lb	5 J
		3" ASME, 150 lb	5 K
		3" ASME, 300 lb	5 L
		3" ASME, 600 lb	5 M
		4" ASME, 150 lb	5 N
		4" ASME, 300 lb	5 P
		4" ASME, 600 lb	5 Q
		<u>Welded flange, 316L stainless steel, Type A flat faced</u>	
		DN 40, PN 16	6 C
		DN 40, PN 40	6 D
		DN 50, PN 16	6 E
		DN 50, PN 40	6 F
		DN 80, PN 16	6 G
		DN 80, PN 40	6 H
		DN 100, PN 16	6 J
		DN 100, PN 40	6 K
		(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)	
		Probe length (length from flange face) (threaded lengths include process thread)	
		<u>Note: No Y01 needed in order code for standard lengths</u>	
		Extended cable, 3000 mm (118.11"), length can be shortened by customer	A
		Extended cable, 6000 mm (236.22"), length can be shortened by customer	B
		Add order code Y01 and plain text: <u>"Insertion length ... mm"</u>	
		Extended cable, 500 ... 1000 mm (19.69 ... 39.37")	E
		Extended cable, 1001 ... 5000 mm (39.41 ... 196.85")	F
		Extended cable, 5001 ... 10000 mm (196.89 ... 393.70")	G
		Extended cable, 10001 ... 15000 mm (393.74 ... 590.55")	H
		Extended cable, 15001 ... 20000 mm (590.59 ... 787.40")	J
		Extended cable, 20001 ... 25000 mm (787.44 ... 984.25")	K
		Thermal Isolator	
		Without thermal isolator	0
		With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]	1

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Standard

Selection and Ordering data	Order No.	Order code
Pointek CLS300 - Standard - Cable Version with C Threaded or Flanged process connection	7 M L 5 6 5 1 -	
Inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.		
Wetted Seals		
FKM	0	
FFKM [for process temperatures above -20°C (-4°F)]	1	
Probe Material		
Bare 316L stainless steel cable, PEEK isolators and 316L stainless steel cable weight	0	
PFA coated cable, PEEK isolators and 316L stainless steel cable weight	1	
Approvals		
Dust Ignition Proof with IS Probe: CE, C-TICK, ATEX II 1/2 D T100 °C	C	
Flameproof Enclosure with IS Probe: CE, C-TICK, ATEX II 1/2 G EEx d[ia] IIC T6...T1, ATEX II 1/2 D T100 °C	D	
Flameproof Enclosure with IS Probe, with WHG approval: CE, C-TICK, ATEX II 1/2 G EEx d[ia] IIC T6...T1, ATEX II 1/2 D T100 °C	E	
Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4	F	
Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4	G	
General Purpose (CSA, FM)	H	
General Purpose (CE, C-TICK)	J	
General Purpose with WHG approval (CSA, FM, CE, C-TICK)	K	
Enclosure and Lid		
Aluminum epoxy coated		
2 x 1/2" NPT via adapter - cable inlet, IP65	A	
2 x M20x1.5 cable inlet, IP65	B	
2 x 1/2" NPT via adapter - cable inlet, IP68	C	
2 x M20x1.5 cable inlet, IP68	D	
Active Shield Length		
Standard length - (125 mm threaded, 105 mm flanged)	0	
Extended shield - (250 mm threaded, 230 mm flanged) ¹⁾	1	
Extended shield - (400 mm threaded, 380 mm flanged) ¹⁾	2	

¹⁾ Available with Probe version options A, B, F to K, only [≥ 1000 mm (39.7")]

C) Subject to export regulations AL: N, ECCN: EAR99

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Standard

Selection and Ordering data		Order No.	Selection and Ordering data	Order No.
Pointek CLS300 - Standard - High Temperature Rod Version with Threaded or Flanged process connection		C) 7ML5652 - 00 - 0	Pointek CLS300 - Standard - High Temperature Rod Version with Threaded or Flanged process connection	C) 7ML5652 - 00 - 0
Inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.			Inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.	
Process Connection			Process Connection	
Threaded, 316L stainless steel			Threaded, 316L stainless steel	
3/4" NPT [(Taper), ANSI/ASME B1.20.1]	0 A		3/4" NPT [(Taper), ANSI/ASME B1.20.1]	E
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B		1" NPT [(Taper), ANSI/ASME B1.20.1]	F
1 1/4" NPT [(Taper), ANSI/ASME B1.20.1]	0 C		1 1/4" NPT [(Taper), ANSI/ASME B1.20.1]	G
1 1/2" NPT [(Taper), ANSI/ASME B1.20.1]	0 D		1 1/2" NPT [(Taper), ANSI/ASME B1.20.1]	
R 3/4" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A		R 3/4" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B		R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	
R 1 1/2" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D		R 1 1/2" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	
G 3/4" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A		G 3/4" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B		G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	
G 1 1/2" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D		G 1 1/2" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	
Welded flange, 316L stainless steel, raised face			Welded flange, 316L stainless steel, Type A flat faced	
1" ASME, 150 lb	5 A		DN 25, PN 16	6 A
1" ASME, 300 lb	5 B		DN 25, PN 40	6 B
1" ASME, 600 lb	5 C		DN 40, PN 16	6 C
1 1/2" ASME, 150 lb	5 D		DN 40, PN 40	6 D
1 1/2" ASME, 300 lb	5 E		DN 50, PN 16	6 E
1 1/2" ASME, 600 lb	5 F		DN 50, PN 40	6 F
2" ASME, 150 lb	5 G		DN 80, PN 16	6 G
2" ASME, 300 lb	5 H		DN 80, PN 40	6 H
2" ASME, 600 lb	5 J		DN 100, PN 16	6 J
3" ASME, 150 lb	5 K		DN 100, PN 40	6 K
3" ASME, 300 lb	5 L		(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)	
3" ASME, 600 lb	5 M			
4" ASME, 150 lb	5 N		Probe length (length from flange face) (threaded lengths include process thread)	
4" ASME, 300 lb	5 P		Note: No Y01 needed in order code for standard lengths	
4" ASME, 600 lb	5 Q		Rod 350 mm (13.78")	A
Welded flange, 316L stainless steel, Type A flat faced			Extended rod, length 500 mm (19.69")	B
DN 25, PN 16	6 A		Extended rod, length 750 mm (29.53")	C
DN 25, PN 40	6 B		Extended rod, length 1000 mm (39.37")	D
DN 40, PN 16	6 C			
DN 40, PN 40	6 D			
DN 50, PN 16	6 E			
DN 50, PN 40	6 F			
DN 80, PN 16	6 G			
DN 80, PN 40	6 H			
DN 100, PN 16	6 J			
DN 100, PN 40	6 K			
Enclosure and Lid				
<u>Aluminum epoxy coated</u>				
2 x 1/2" NPT via adapter - cable inlet, IP65				A
2 x M20x1.5 cable inlet, IP65				B
2 x 1/2" NPT via adapter - cable inlet, IP68				C
2 x M20x1.5 cable inlet, IP68				D
Active Shield Length				
Standard length - (125 mm threaded, 105 mm flanged)				0
Extended shield - (250 mm threaded, 230 mm flanged) ¹⁾				1
Extended shield - (400 mm threaded, 380 mm flanged) ²⁾				2

¹⁾ Available with Probe version options B to D, F, G only [≥ 500 mm (19.69")]

²⁾ Available with Probe version options C, D, and, G only [≥ 750 mm (29.53")]

C) Subject to export regulations AL: N, ECCN: EAR99H

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Standard

Selection and Ordering data	Order code
<i>Further designs</i>	
Please add "-Z" to Order No. and specify Order code(s).	
Total insertion length: enter the total insertion length in plain text description	Y01
Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11
Inspection Certificate Type 3.1 per EN 10204	C12
<i>Operating Instructions</i>	
Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.	See page 5/54
<i>Accessories</i>	See page 5/54

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Digital

Overview



Pointek CLS300 (digital version) is an inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present. The digital version includes PROFIBUS PA, an LCD display, and advanced diagnostic features.

Benefits

- Patented Active-Shield technology so measurement is unaffected by material buildup or nozzle interference in active shield section
- Performs in extremely abrasive conditions because of solid rod construction
- Push-button calibration, full-function diagnostics
- High sensitivity allows installation in a wide range of liquids, solids or slurry applications
- Integral LCD display allows for easy menu-driven setup
- PROFIBUS PA communication (SIMATIC PDM compatible)

Application

Pointek CLS300 digital version provides an integral LCD display for stand-alone use, with PROFIBUS PA communication (Profile version 3.0, Class B) when required. Solid-state switch alarm is standard.

The robust design of CLS300 makes it specifically applicable for heavy solids applications where abrasive materials occur as in the mining industry.


The fully potted electronics are unaffected by condensation, dust or vibration.

Wetted parts are made of stainless steel with a PFA shield for high chemical resistance, and of ceramic and stainless steel for high temperature version. Materials with low or high dielectric constants can be accurately detected. The unique Active Shield suppresses interference from material buildup or long installation nozzles.


The unique modular design of the Pointek CLS300 provides a wide range of configurations, process connections, extensions and approvals to meet the temperature and pressure requirements of specific applications. The modular design makes ordering easier and reduces stocking requirements. A wide range of probe configurations are available, including rod and cable versions.

- Key Applications: liquids, slurries, bulk solids, relatively high pressure and temperature, hazardous areas, milling and mining applications


Configuration

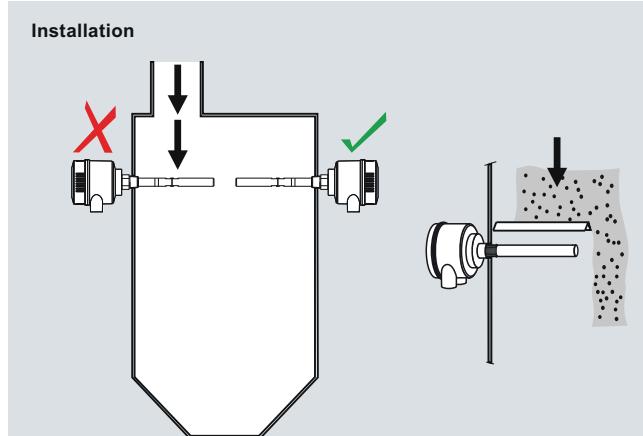

Keep unit out of path of falling material, or protect probe from falling material.

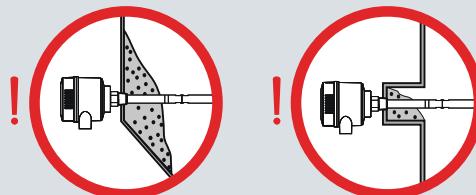

Build up of material in active shield area does not affect switch operation.

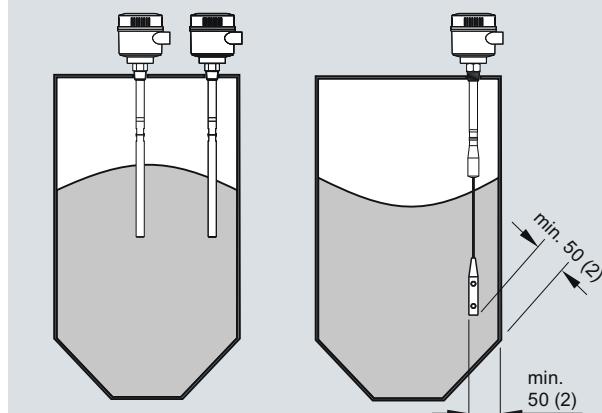

Install probe at least 50 mm (2") from tank wall.
Note angle of repose and adjust accordingly.

Pointek CLS300 installation, dimensions in mm (inch)

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Digital

Technical specifications

Mode of operation	
Measuring principle	Inverse frequency shift capacitive level detection
Input	
Measured variable	Change in picoFarad (pF)
Output	
Solid-state output	
• Output	Galvanically isolated
• Protection	Against reversed polarity (bipolar)
• Max. switching voltage	• 30 V (DC) • 30 V peak (AC)
• Max. load current	82 mA
• Voltage drop	< 1 V, typical at 50 mA
• Time delay (pre or post switching)	Programmable by user (0 ... 100 s)
Fail-safe mode	Min. or max.
Connection	Removable terminal block
Accuracy	
Resolution	
• Min. sensitivity (pF)	1 % change in actual capacitance
• Max. temperature error	0.2 % of actual capacitance value
Rated operating conditions ¹⁾	
Installation conditions	
Location	Indoor/outdoor
Ambient conditions	
• Ambient temperature	-40 ... +85 °C (-40 ... +185 °F) ²⁾
Medium conditions	Liquids, bulk solids, slurries and interfaces, and applications with viscous materials
• Relative dielectric constant ϵ_r	Min. 1.5
• Process temperature - Rod/Cable version	-40 ... +200 °C (-40 ... +392 °F) ²⁾
- High Temperature version	-40 ... +400 °C (-40 ... +752 °F)
• Process pressure ³⁾	-1 ... +35 bar g (-14.6 ... +511 psi g)
Design	
Material (enclosure)	Powder-coated aluminum with gasket
Degree of protection	Standard: Type 4/NEMA 4/IP65 Optional: Type 4/NEMA 4/IP68
Cable inlet	2 x M20x1.5 thread (option: 2 x ½" NPT conduit entry including 1 plugged entry)

Controls and displays	
Local display	LCD
Configuration	• Locally, using 3 button keypad (for standalone operation) • Remotely, using SIMATIC PDM (for installation on a network)
Power supply	
Bus voltage (at process connection)	• Standard: 12 ... 30 V DC • Intrinsically Safe: 12 ... 24 V DC
Current consumption	12.5 mA
Certificates and approvals	
General Purpose	CSA, FM, CE, C-TICK
Dust Ignition Proof	ATEX II 1/2 D, 2 D IP6X T100 °C
Flameproof Enclosure with IS Probe	ATEX II 1/2 G EEx d[ia] IIC T6...T4 ATEX II 1/2 D T100 °C
Dust Ignition Proof with IS Probe	CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
Intrinsically Safe ⁴⁾	ATEX II 1 G EEx ia IIC T6...T4 ATEX II 1/2 D, 2 D IP6X T100 °C CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
Non-incendive	CSA/FM Class I, Div. 2, Gr. A, B, C, D CSA/FM Class II, Div. 2, Gr. F, G CSA/FM Class III T4 or T6
Explosion Proof with IS Probe	CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4
Marine	Lloyds Register of Shipping, Categories ENV1, ENV2 and ENV5
Others	Pattern Approval (China)
Communication	
	PROFIBUS PA (IEC 61158 CPF3 CP3/2) Bus physical layer: IEC 61158-2 MBP-(IS) Device profile: PROFIBUS PA profile for Process Control Devices Version 3.0, Class B FISCO field device

¹⁾ When operation is in areas classified as hazardous, observe restrictions according to relevant certificate.
See also Pressure/Temperature curves starting on page 5/55.

²⁾ Thermal isolator is used if process connection temperature exceeds +85 °C (+185 °F)

³⁾ Pressure rating of process seal is temperature dependent.
See Pressure/Temperature curves starting on page 5/55.

⁴⁾ Barrier or Intrinsically safe power supply required for Intrinsically Safe protection

Design: Probe	Rod version	High Temperature version	Cable version
Length	Min. 250 mm (9.8"), max. 1000 mm (40")	Min. 250 mm (9.8"), max. 1000 mm (40")	Min. 1000 mm (40"), max. 25000 mm (984")
Sensor wetted parts	PFA (no insulation on active probe), 316L stainless steel, PEEK isolators	Ceramic (ZrO_2) ¹⁾ isolators (no insulation on active probe), 316L stainless steel	316 stainless steel, optional PFA, PEEK isolators
O-ring seal material	FKM (optional FFKM) ²⁾	Graphite ²⁾	FKM (optional FFKM) ²⁾
Thermal isolator	Optional	Standard	Optional
Extension	User selectable length	User selectable length	User selectable cable length

¹⁾ Zirconium Oxide

²⁾ For Caustic Materials please contact nacc.smpi@siemens.com for alternative O-rings

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Digital

Selection and Ordering data		Order No.
Pointek CLS300 - Digital - Rod with Threaded or C) Flanged process connection		7 ML 5 6 6 0 -
Inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.		
Process Connection		
Threaded_316L_stainless steel		
¾" NPT [(Taper), ANSI/ASME B1.20.1]	0 A	
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B	
1¼" NPT [(Taper), ANSI/ASME B1.20.1]	0 C	
1½" NPT [(Taper), ANSI/ASME B1.20.1]	0 D	
R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A	
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B	
R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D	
G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A	
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B	
G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D	
<u>Welded flange_316L_stainless steel_raised face</u>		
1" ASME, 150 lb	5 A	
1" ASME, 300 lb	5 B	
1" ASME, 600 lb	5 C	
1½" ASME, 150 lb	5 D	
1½" ASME, 300 lb	5 E	
1½" ASME, 600 lb	5 F	
2" ASME, 150 lb	5 G	
2" ASME, 300 lb	5 H	
2" ASME, 600 lb	5 J	
3" ASME, 150 lb	5 K	
3" ASME, 300 lb	5 L	
3" ASME, 600 lb	5 M	
4" ASME, 150 lb	5 N	
4" ASME, 300 lb	5 P	
4" ASME, 600 lb	5 Q	
<u>Welded flange_316L_stainless steel_Type A flat faced</u>		
DN 25, PN 16	6 A	
DN 25, PN 40	6 B	
DN 40, PN 16	6 C	
DN 40, PN 40	6 D	
DN 50, PN 16	6 E	
DN 50, PN 40	6 F	
DN 80, PN 16	6 G	
DN 80, PN 40	6 H	
DN 100, PN 16	6 J	
DN 100, PN 40	6 K	
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)		
Probe length (length from flange face) (threaded lengths include process thread)		
<u>Note: No Y01 needed in order code for standard lengths</u>		
Standard version, rod 350 mm (13.78")	A	
Extended rod, length 500 mm (19.69")	B	
Extended rod, length 750 mm (29.53")	C	
Extended rod, length 1000 mm (39.37")	D	

Selection and Ordering data		Order No.
Pointek CLS300 - Digital - Rod with Threaded or C) Flanged process connection		7 ML 5 6 6 0 -
Inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.		
Add order code Y01 and plain text: "Insertion length ... mm"		
Extended rod, factory adjusted length 250 ... 499 mm (9.8 ... 19.65")		
Extended rod, factory adjusted length 500 ... 749 mm (19.69 ... 29.49")		
Extended rod, factory adjusted length 750 ... 999 mm (29.53 ... 39.37")		
Thermal Isolator		
Without thermal isolator		
With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]		
Wetted Seals		
FKM		
FFKM [for process temperatures above -20°C (-4°F)]		
Probe Material		
316L stainless steel with PFA lining and PEEK isolators		
Approvals		
Dust Ignition Proof: CE, C-TICK, ATEX II 1/2 D, 2 D IP6X T100 °C		
Intrinsically Safe ¹⁾ CE, C-TICK, ATEX II 1 G EEx ia IIC T6...T4, ATEX II 1/2 D, 2 D IP6X T100 °C		
Flameproof Enclosure with IS Probe: CE, C-TICK, ATEX II 1/2 G EEx d[ia] IIC T6...T4, ATEX II 1/2 D T100 °C		
Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4		
Intrinsically Safe ¹⁾ CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4		
Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4		
General Purpose (CSA, FM)		
General Purpose (CSA, FM, CE, C-TICK)		
Enclosure and Lid		
Aluminum epoxy coated		
2 x ½" NPT via adapter - cable inlet, IP65 2 x M20x1.5 cable inlet, IP65		
2 x ½" NPT via adapter - cable inlet, IP68 2 x M20x1.5 cable inlet, IP68		
Active Shield Length		
Standard length - (125 mm threaded, 105 mm flanged)		
Extended shield - (250 mm threaded, 230 mm flanged) ²⁾		
Extended shield - (400 mm threaded, 380 mm flanged) ³⁾		

¹⁾ Barrier or Intrinsically safe power supply required for Intrinsically Safe protection

²⁾ Available with Probe version options B to D, F, G only [≥ 500 mm (19.69")]

³⁾ Available with Probe version options C, D, and, G only [≥ 750 mm (29.53")]

C) Subject to export regulations AL: N, ECCN: EAR99

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Digital

Selection and Ordering data		Order code	Selection and Ordering data	Order No.
Further designs			Pointek CLS300 - Digital - Cable with Threaded or Flanged process connection	C) 7 M L 5 6 6 1 -
Please add "-Z" to Order No. and specify Order code(s).			Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces	
Total insertion length: enter the total insertion length in plain text description	Y01			
Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15			
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11			
Inspection Certificate Type 3.1 per EN 10204	C12			
Operating Instructions	See page 5/54		Welded flange, 316L stainless steel, raised face	
Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.	See page 5/54		1½" ASME, 150 lb 1½" ASME, 300 lb 1½" ASME, 600 lb	5 D 5 E 5 F
Accessories	See page 5/54		2" ASME, 150 lb 2" ASME, 300 lb 2" ASME, 600 lb	5 G 5 H 5 J
			3" ASME, 150 lb 3" ASME, 300 lb 3" ASME, 600 lb	5 K 5 L 5 M
			4" ASME, 150 lb 4" ASME, 300 lb 4" ASME, 600 lb	5 N 5 P 5 Q
			Welded flange, 316L stainless steel, Type A flat faced	
			DN 40, PN 16 DN 40, PN 40 DN 50, PN 16	6 C 6 D 6 E
			DN 50, PN 40 DN 80, PN 16 DN 80, PN 40	6 F 6 G 6 H
			DN 100, PN 16 DN 100, PN 40	6 J 6 K
			(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)	
			Probe length (length from flange face) (threaded lengths include process thread)	
			Note: No Y01 needed in order code for standard lengths	
			Extended cable, 3000 mm (118.11"), length can be shortened by customer	A
			Extended cable, 6000 mm (236.22"), length can be shortened by customer	B
			Add order code Y01 and plain text: "Insertion length ... mm"	
			Extended cable, 500 ... 1000 mm (19.69 ... 39.37")	E
			Extended cable, 1001 ... 5000 mm (39.41 ... 196.85")	F
			Extended cable, 5001 ... 10000 mm (196.89 ... 393.70")	G
			Extended cable, 10001 ... 15000 mm (393.74 ... 590.55")	H
			Extended cable, 15001 ... 20000 mm (590.59 ... 787.40")	J
			Extended cable, 20001 ... 25000 mm (787.44 ... 984.25")	K

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Digital

Selection and Ordering data		Order No.
Pointek CLS300 - Digital - Cable with Threaded or Flanged process connection		C) 7 ML 5 6 6 1 -
Versatile inverse frequency shift capacitance level switch with optional process connection choices and configurable output, ideal for detection of liquids, solids, slurries, foam and interfaces		
Thermal Isolator	0	
Without thermal isolator	1	
With thermal isolator [for process connection temperatures over +85 °C (+185 °F)]		
Wetted Seals	0	
FKM	1	
FFKM [for process temperatures above -20°C (-4°F)]		
Probe Material	0	
Bare 316L stainless steel cable, PEEK isolators and 316L stainless steel cable weight	1	
PFA coated cable, PEEK isolators and 316L stainless steel cable weight		
Approvals	B	
Dust Ignition Proof: CE, C-TICK, ATEX II 1/2 D, 2 D IP6X T100 °C	C	
Intrinsically Safe ¹⁾ CE, C-TICK, ATEX II 1 G EEx ia IIC T6...T4, ATEX II 1/2 D, 2 D IP6X T100 °C	D	
Flameproof Enclosure with IS Probe: CE, C-TICK, ATEX II 1/2 G EEx d[ia] IIC T6...T4, ATEX II 1/2 D T100 °C	E	
Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4	F	
Intrinsically Safe ¹⁾ CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4	G	
Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Gr. A, B, C, D CSA/FM Class II, Div. 1, Gr. E, F, G CSA/FM Class III T4	H	
General Purpose (CSA, FM)	I	
General Purpose (CSA, FM, CE, C-TICK)	J	
Enclosure and Lid	A	
<u>Aluminum epoxy coated</u>	B	
2 x ½" NPT via adapter - cable inlet, IP65	C	
2 x M20x1.5 cable inlet, IP65	D	
2 x ½" NPT via adapter - cable inlet, IP68		
2 x M20x1.5 cable inlet, IP68		
Active Shield Length	0	
Standard length - (125 mm threaded, 105 mm flanged)	1	
Extended shield - 250 mm threaded, 230 mm flanged ²⁾	2	
Extended shield - (400 mm threaded, 380 mm flanged ²⁾)		

¹⁾ Barrier or Intrinsically safe power supply required for Intrinsically Safe protection

²⁾ Available with Probe version options A, B and, F to K only
[≥ 1000 mm (39.7")]

C) Subject to export regulations AL: N, ECCN: EAR99

Selection and Ordering data	Order code
Further designs	
Please add "-Z" to Order No. and specify Order code(s).	
Total insertion length: enter the total insertion length in plain text description	Y01
Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11
Inspection Certificate Type 3.1 per EN 10204	C12
Operating Instructions	
Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.	See page 5/54
Accessories	
	See page 5/54

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Digital

Selection and Ordering data		Order No.	Selection and Ordering data	Order No.
Pointek CLS300 - Digital - High Temperature Rod version with Threaded or Flanged process connection		C) 7ML5662 - 00 - 0	Pointek CLS300 - Digital - High Temperature Rod version with Threaded or Flanged process connection	C) 7ML5662 - 00 - 0
Inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.			Inverse frequency shift capacitance level switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam and interfaces in demanding conditions where high pressure and temperatures are present.	
Process Connection			Probe Material	
<u>Threaded, 316L stainless steel</u>			316L stainless steel with ceramic (ZrO_2) isolators	0
¾" NPT [(Taper), ANSI/ASME B1.20.1]	0 A			B
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B			C
1¼" NPT [(Taper), ANSI/ASME B1.20.1]	0 C			D
1½" NPT [(Taper), ANSI/ASME B1.20.1]	0 D			E
R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A			F
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B			G
R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D			H
G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A			I
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B			J
G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D			
<u>Welded flange, 316L stainless steel, raised face</u>			Enclosure and Lid	
1" ASME, 150 lb	5 A		<u>Aluminum epoxy coated</u>	
1" ASME, 300 lb	5 B		2 x ½" NPT via adapter - cable inlet, IP65	A
1" ASME, 600 lb	5 C		2 x M20x1.5 cable inlet, IP65	B
1½" ASME, 150 lb	5 D		2 x ½" NPT via adapter - cable inlet, IP68	C
1½" ASME, 300 lb	5 E		2 x M20x1.5 cable inlet, IP68	D
1½" ASME, 600 lb	5 F			
2" ASME, 150 lb	5 G		Active Shield Length	
2" ASME, 300 lb	5 H		Standard length - (125 mm threaded, 105 mm flanged)	0
2" ASME, 600 lb	5 J		Extended shield - (250 mm threaded, 230 mm flanged) ²⁾	1
3" ASME, 150 lb	5 K		Extended shield - (400 mm threaded, 380 mm flanged) ³⁾	2
3" ASME, 300 lb	5 L			
3" ASME, 600 lb	5 M			
4" ASME, 150 lb	5 N			
4" ASME, 300 lb	5 P			
4" ASME, 600 lb	5 Q			
<u>Welded flange, 316L stainless steel</u>				
<u>Type A flat faced</u>				
DN 25, PN 16	6 A			
DN 25, PN 40	6 B			
DN 40, PN 16	6 C			
DN 40, PN 40	6 D			
DN 50, PN 16	6 E			
DN 50, PN 40	6 F			
DN 80, PN 16	6 G			
DN 80, PN 40	6 H			
DN 100, PN 16	6 J			
DN 100, PN 40	6 K			
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)				
Probe length (length from flange face) (threaded lengths include process thread)				
<u>Note: No Y01 needed in order code for standard lengths</u>				
Standard version, rod 350 mm (13.78")	A		Selection and Ordering data	Order code
Extended rod, length 500 mm (19.69")	B		<u>Further designs</u>	
Extended rod, length 750 mm (29.53")	C		Please add "-Z" to Order No. and specify Order code(s).	
Extended rod, length 1000 mm (39.37")	D		Total insertion length: enter the total insertion length in plain text description	Y01
Add order code Y01 and plain text: "Insertion length ... mm"	E		Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15
Extended rod, factory adjusted length 250 ... 499 mm (9.8 ... 19.65")	F		Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11
Extended rod, factory adjusted length 500 ... 749 mm (19.69 ... 29.49")	G		Inspection Certificate Type 3.1 per EN 10204	C12
Extended rod, factory adjusted length 750 ... 999 mm (29.53 ... 39.3")			Operating Instructions	
Wetted Seals			Note: The Operating Instructions should be ordered as a separate line on the order.	See page 5/54
Graphite	0		This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and manual library.	
			Accessories	See page 5/54

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Standard and Digital

Selection and Ordering data	Order No.
<i>Operating Instructions - Standard</i>	
English	C) 7ML1998-5JH02
German	C) 7ML1998-5JH32
Note: The Operating Instructions should be ordered as a separate line on the order.	
Quick Start manual, multi-language	C) 7ML1998-5QY82
This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	
<i>Operating Instructions - Digital</i>	
English	C) 7ML1998-5JJ02
German	C) 7ML1998-5JJ32
Note: The Operating Instructions should be ordered as a separate line on the order.	
Quick Start manual, multi-language	C) 7ML1998-5XA82
This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	
Accessories	
One metallic cable gland M20x1.5, -40 ... +80 °C (-40 ... +176 °F) with integrated shield connection (available for PROFIBUS PA)	7ML1930-1AQ
General Purpose	
1/2" NPT General Purpose Cable Entry IP68/IP69K C) A5E03252530 NEMA6, -40 ... -100 °C (-40 ... -212 °F), cable size 6 ... 12 mm (0.236 ... 0.472")	
M20x1.5 General Purpose Cable Entry IP68/IP69K C) A5E03252531 NEMA6,-40 ... -100 °C (-40 ... -212 °F), cable size 7 ... 12 mm (0.275 ... 0.472")	
Hazardous Locations	
1/2" NPT EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD ExtD A21 (Zone 1,Zone 2, Zone 21, Zone 22, and in Gas Groups IIA,IIB and IIC) -60 ... +80 °C IP66,IP67,IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472")	A5E03252527
M20 EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD ExtD A21 (Zone 1,Zone 2, Zone 21, Zone 22 and in Gas Groups IIA,IIB and IIC) -60 ... +80 °C IP66,IP67,IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472")	A5E03252528
Blind threaded flanges are available. Please contact nacc.smpi@siemens.com with a completed application data sheet on page 5/9	
Pointek Specials	See page 5/77

C) Subject to export regulations AL: N, ECCN: EAR99


Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Standard and Digital

Characteristic curves


Pressure/Temperature Curve
CLS300 Extended Rod and Cable Probes
Threaded Process Connections
 (7ML5650, 7ML5651, 7ML5660 and 7ML5661)

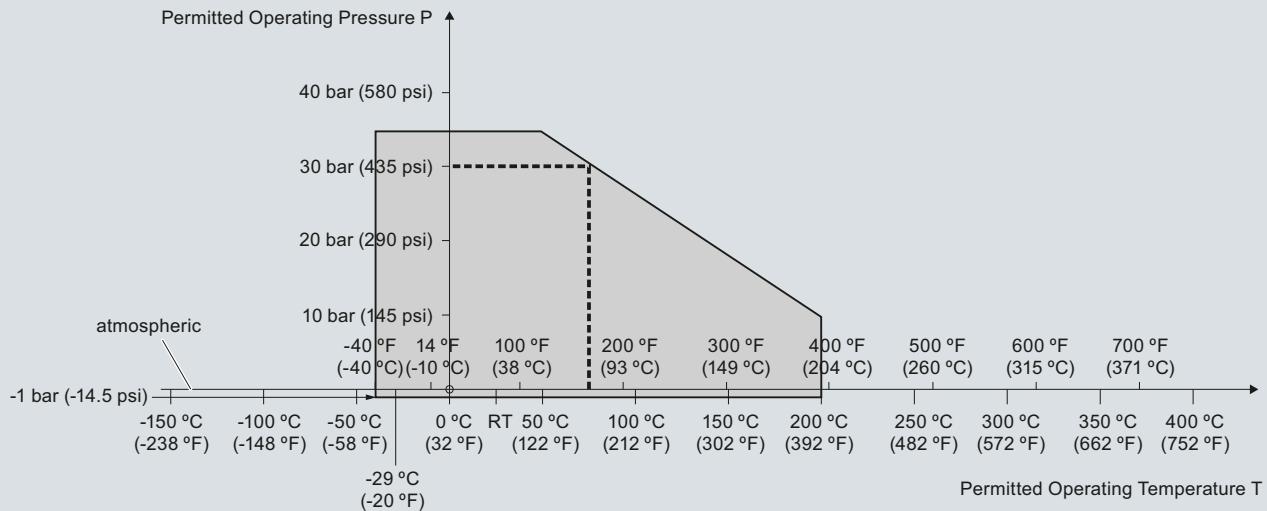

----- Example:
 Permitted operating pressure = 30 bar (435 psi) at 75 °C

Pointek CLS300 Process Pressure/Temperature derating curves (7ML5650, 7ML5651, 7ML5660 and 7ML5661)

Pressure/Temperature Curve
CLS300 High Temperature Rod Probes
Threaded Process Connections
 (7ML5652 and 7ML5662)

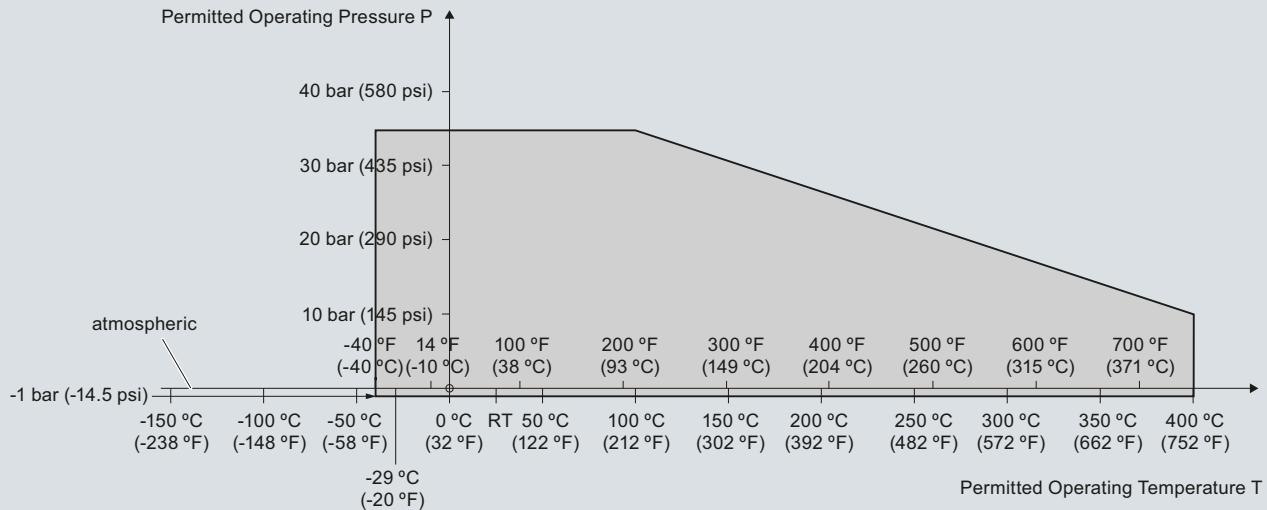


Pointek CLS300 Process Pressure/Temperature derating curves (7ML5652 and 7ML5662)

Level Measurement

Point level measurement - Capacitance switches


Pointek CLS300 - Standard and Digital

Pressure/Temperature Curve
CLS300 Extended Rod and Cable Probes
ASME Flanged Process Connections
(7ML5650, 7ML5651, 7ML5660 and 7ML5661)

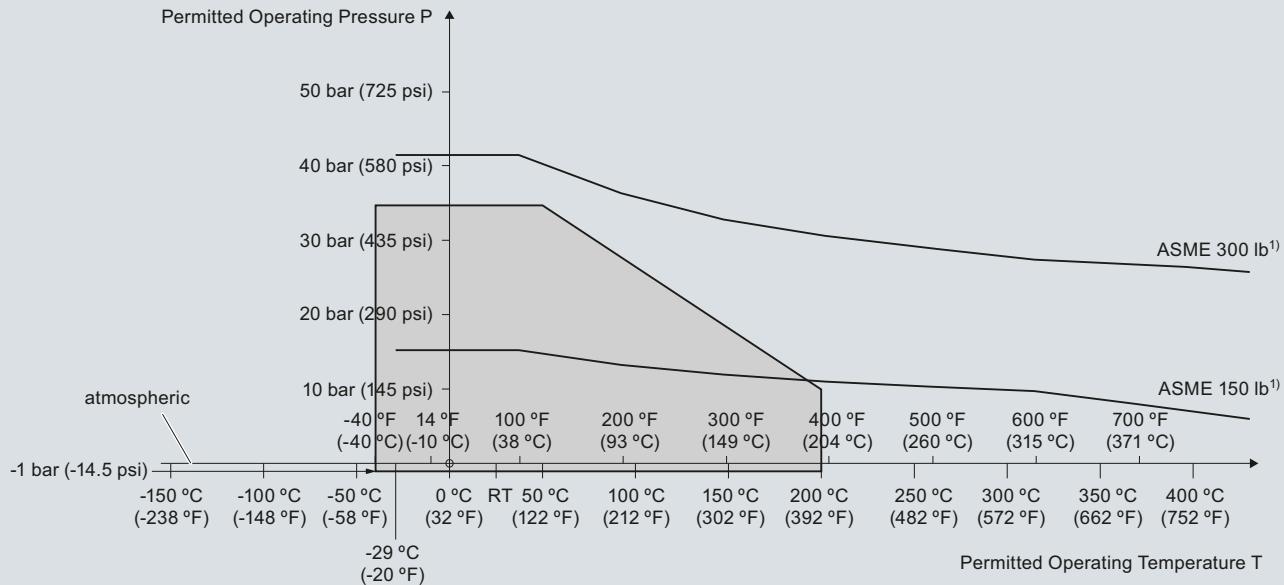

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS300 Process Pressure/Temperature derating curves (7ML5650, 7ML5651, 7ML5660, and 7ML5661)

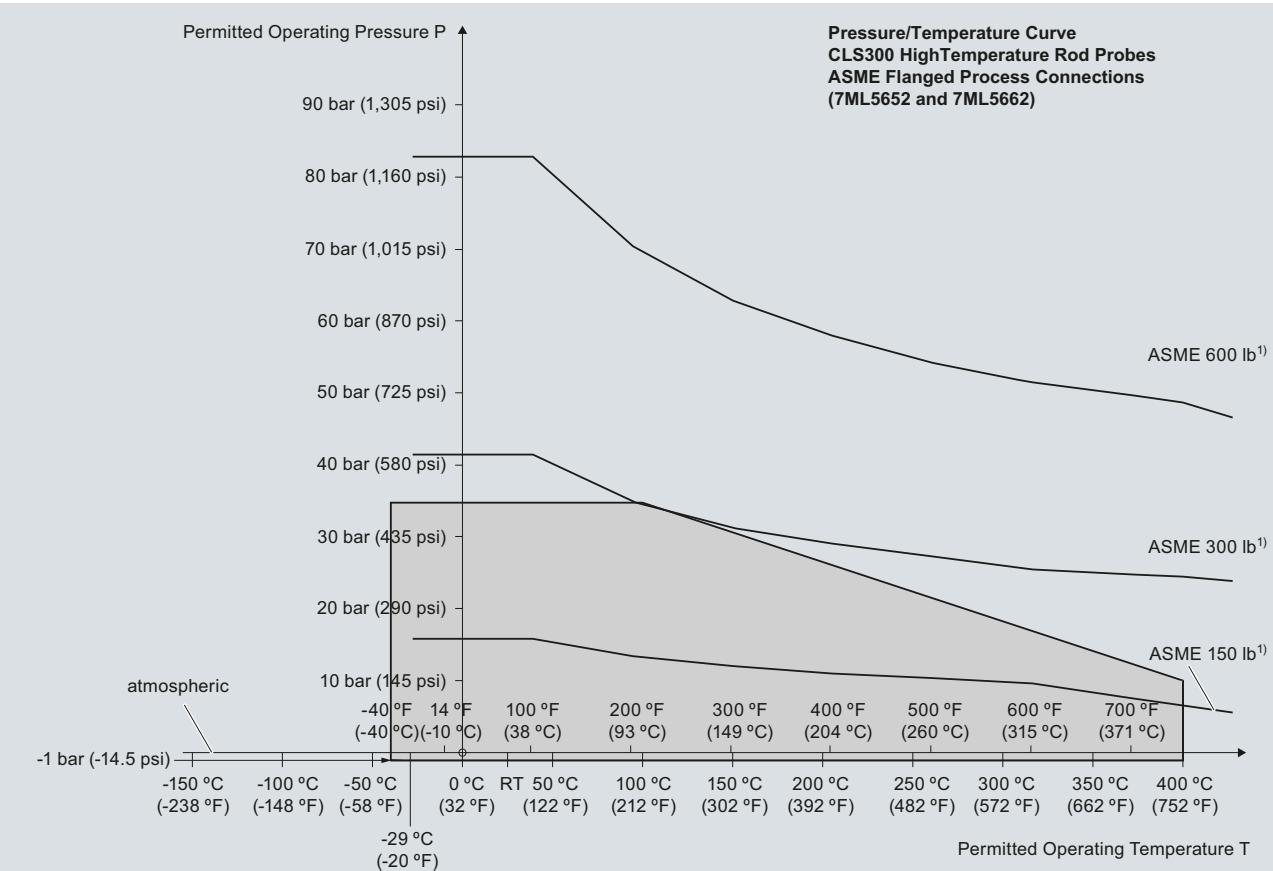

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.


Pointek CLS300 Process Pressure/Temperature derating curves (7ML5652 and 7ML5662)

Level Measurement

Point level measurement - Capacitance switches

Pointek CLS300 - Standard and Digital


Pressure/Temperature Curve
CLS300 Extended Rod and Cable Probes
EN Flanged Process Connections
(7ML5650, 7ML5651, 7ML5660 and 7ML5661)

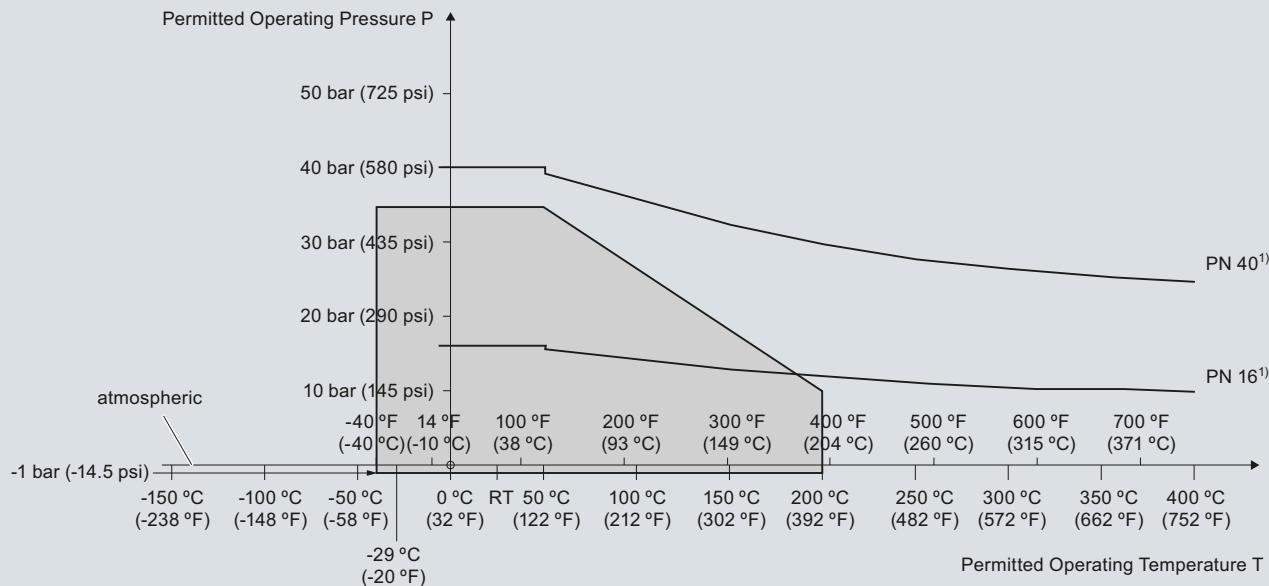

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS300 Process Pressure/Temperature derating curves (7ML5650, 7ML5651, 7ML5660 and 7ML5661)

Pressure/Temperature Curve
CLS300 High Temperature Rod Probes
EN Flanged Process Connections (7ML56552 and 7ML5662)

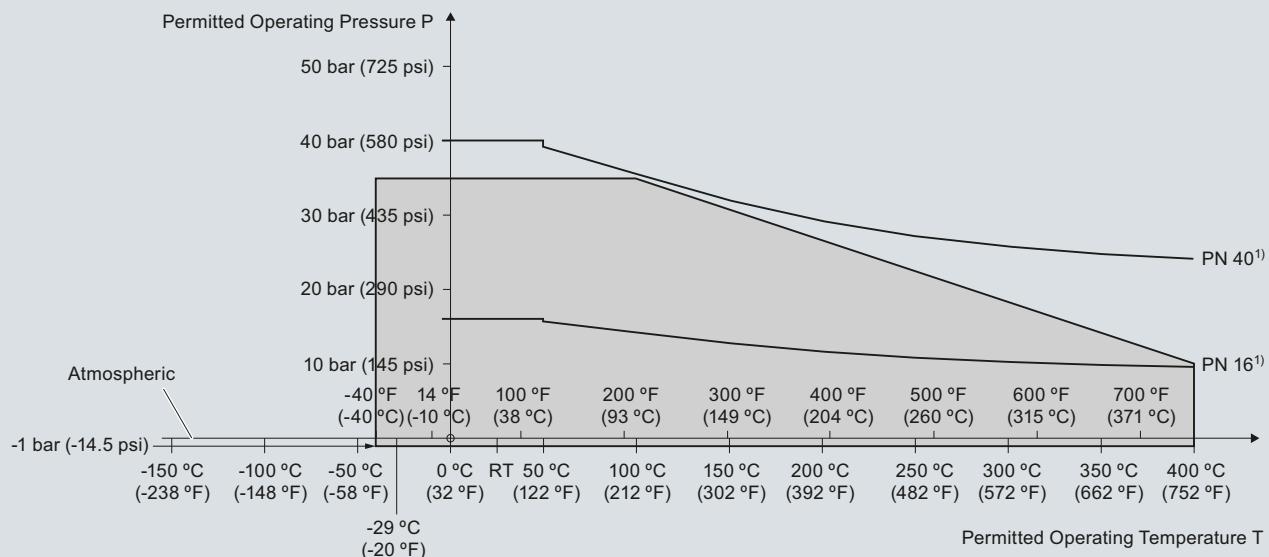

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS300 Process Pressure/Temperature derating curves (7ML5652 and 7ML5662)


Level Measurement

Point level measurement - Capacitance switches



Pointek CLS300 - Standard and Digital

Dimensional drawings


Rod version
Threaded (7ML5650 and 7ML5660)

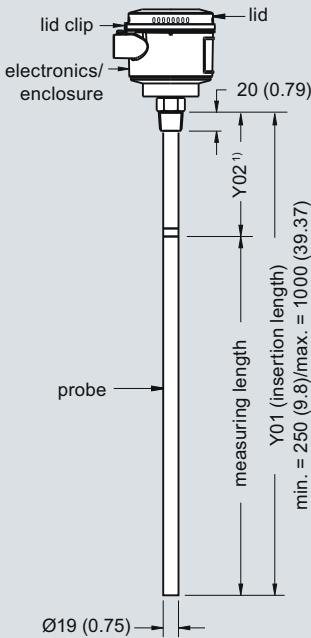


High temperature rod version
Threaded (7ML5652 and 7ML5662)

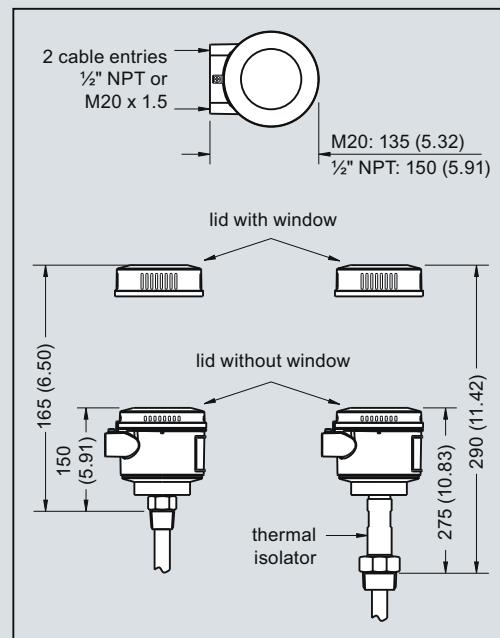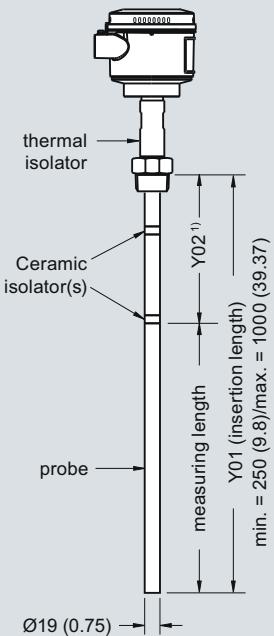

Cable version, non-insulated
Threaded (7ML5651 and 7ML5661)

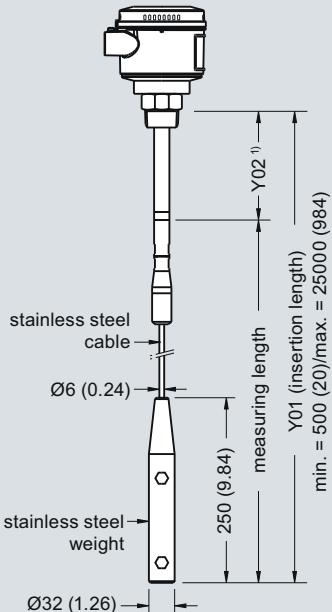

Cable version, insulated
Threaded (7ML5651 and 7ML5661)

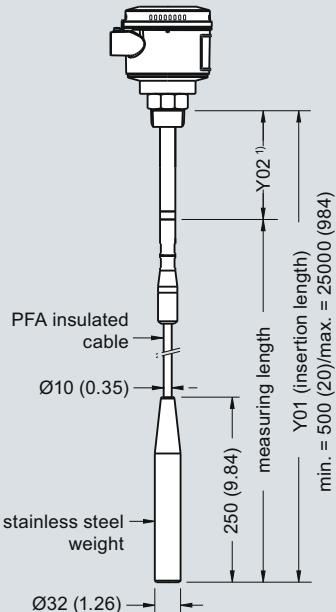

Note:

¹⁾ Extended Active Shield (Y02): standard length 125 mm (4.92"). Optional active shield lengths: 250 mm (9.84") or 400 mm (15.75").


Pointek CLS300 - Threaded Process Connections, dimensions in mm (inch)

Level Measurement



Point level measurement - Capacitance switches

Pointek CLS300 - Standard and Digital


Rod version
Welded flange (7ML5650 and 7ML5660)

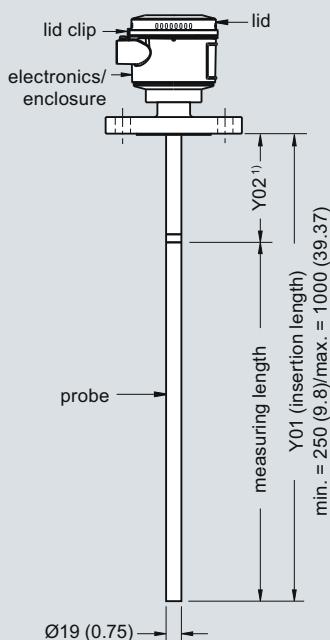


High temperature rod version
Welded flange (7ML5652 and 7ML5662)

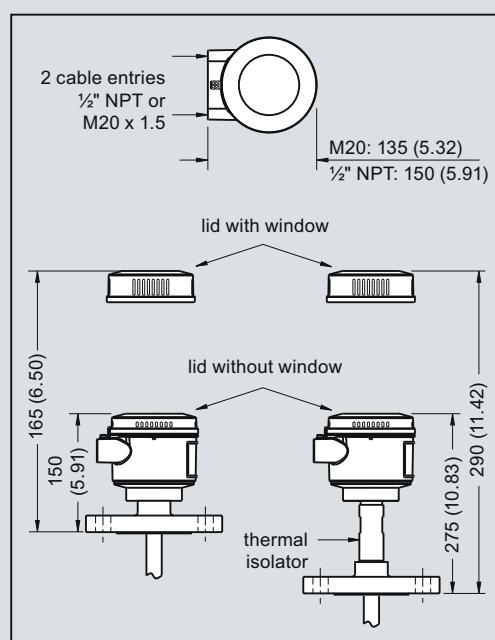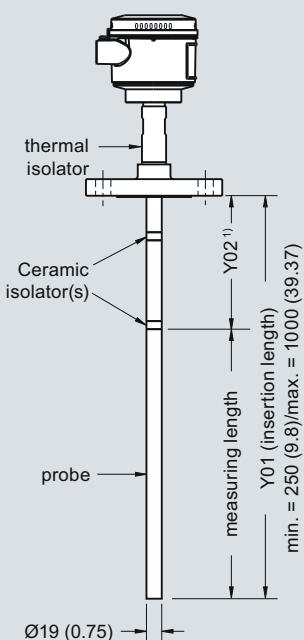

Cable version, non-insulated
Welded flange (7ML5651 and 7ML5661)

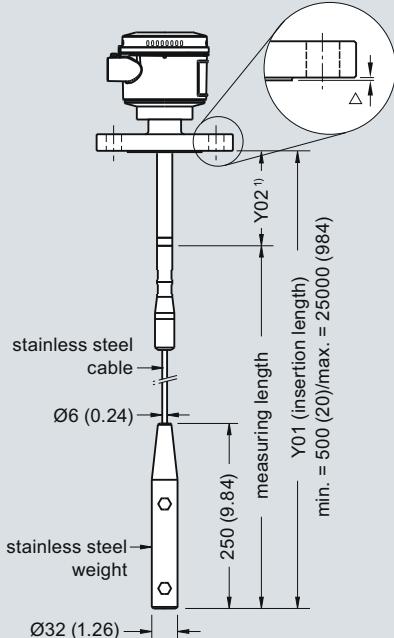

Cable version, insulated
Welded flange (7ML5651 and 7ML5661)

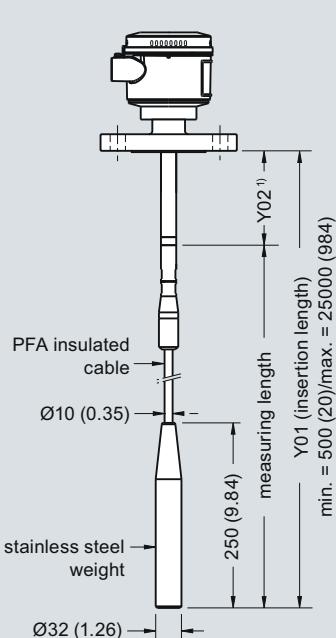

Flange Facing (raised face)	
Flange Class	Facing thickness
△ ASME 150/300	2 (0.08)
△ ASME 600/900	7 (0.28)
△ PN16/40	2 (0.08)

Note:

¹⁾ Extended Active Shield (Y02): standard length 105 mm (4.13"). Optional active shield lengths: 230 mm (9.06") or 380 mm (14.96"). Insertion length does not include any raised face/gasket face dimension (see Flange Facing Table above)


Pointek CLS300 - Flanged Process Connections, dimensions in mm (inch)

Level Measurement


Point level measurement - Capacitance switches

Pointek CLS300 - Standard and Digital

Schematics

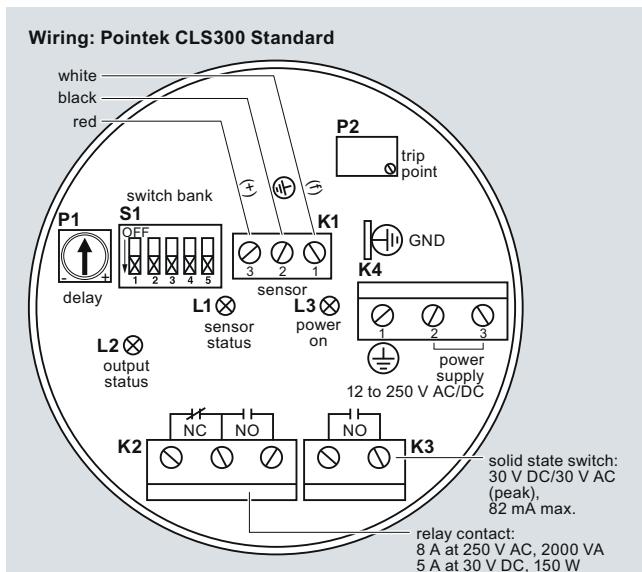
Notes:

- Identification label is on underside of lid. Switch and Potentiometer settings are for illustration purposes only (Refer to Operation/Setup in manual).
- All field wiring must have insulation suitable for at least 250 V.
- Relay contact terminals are for use with equipment having no accessible live parts and wiring having insulation suitable for at least 250 V.
- Maximum working voltage between adjacent relay contacts shall be 250 V.
- Refer to the Instruction Manual or contact Siemens representative for detailed wiring information.

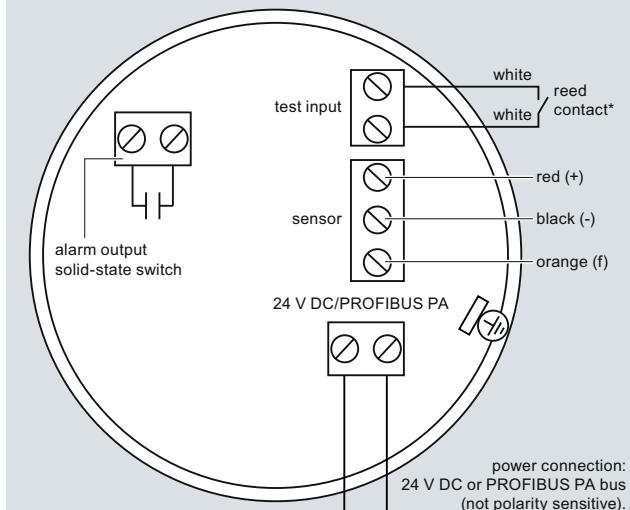Wiring: Pointek CLS300 Digital

Notes:

Refer to the Instruction Manual or contact a Siemens representative for detailed wiring information.

***Magnet Activated Sensor Test**

A magnet can be used to test the sensor without opening the lid of the Pointek CLS300 Digital version. Bring the magnet close to the test area indicated on the enclosure. The sensor test starts and finishes automatically after 10 seconds.



Pointek CLS300 connection

FINE CONTROLS (UK) LTD



Fine Controls have been supplying process controls & instrumentation equipment since 1994, & now serves an ever expanding customer base, both in the UK & globally.

We offer a full range of valve & instrumentation products & services, with our product range representing leading technologies & brands:

Flow: Flow Meters & Transmitters, Flow Switches, Flow Control Valves & Batch Control Systems

Temperature: Temperature Probes & Thermowells, Temperature Transmitters, Temperature Regulators & Temperature Displays

Level: Level Transmitters & Switches

Pressure: Pressure Gauges & Transmitters, Precision & High Pressure Regulators & I-P Converters, Volume boosters.

Precision Pneumatics: Pressure Regulators, I-P Converters, Volume Boosters, Vacuum Regulators

Valves: Solenoid & Pneumatic Valves, Control Valves & Positioners, Actuated Ball, Globe or Diaphragm Valves & Isolation Valves

Services: Repair, Calibration, Panel Build, System Design & Commissioning

 FAIRCHILD
A rotork® Brand












Solenoid Valves
A rotork® Brand




A rotork® Brand








Baumer Group




CONTROLS
A rotork® Brand

